# **VT.377SP**

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







# Semi-polished

#### **Properties**

















## PTV 36+

#### Other formats available





#### Other finishes available







Natural

Grip

#### Sizes available

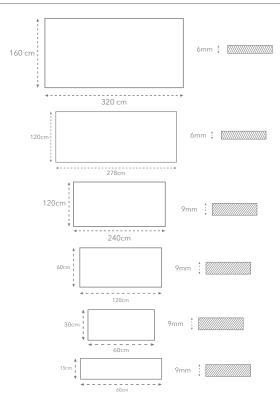



## www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.377SP



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties          | Norm/test method       | Required Standard          | Results                   |
|---|------------------------|----------------------------|---------------------------|
| Thickness                               | EN ISO 10545-2         | ± 5.0% / ± 0.5mm           | Conforms                  |
| Straightness of sides                   | IEN ISO 10545-2        | ± 0.3% / ± 1.0mm           | Conforms                  |
| Rectangularity                          | EN ISO 10545-2         | ± 0.6% / ± 2.0mm           | Conforms                  |
| Warpage                                 | EN ISO 10545-2         | ± 0.5% / ± 2.0mm           | Conforms                  |
| Water absorption                        | EN ISO 10545-3         | ≤ 0.5%                     | ≤ 0.1%                    |
| Flexion Resistance                      | EN ISO 10545-4         | $AR \ge 35 \text{ N/mm}^2$ | ≥ 48 N/mm²                |
| Abrasion Resistance                     | IEN ISO 10545-6        | ≤ 175mm²                   | < 150mm <sup>2</sup>      |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8         | -                          | < 6.6*10 <sup>-6</sup> °C |
| Resistance to Thermal Shocks            | EN ISO 10545-9         | -                          | Stands the test           |
| Frost Resistance                        | EN ISO 10545-12        | -                          | Stands the test           |
| Resistance to Chemicals                 | EN ISO 10545-13        | UB Min.                    | Class A                   |
| Resistance to Stains                    | EN ISO 10545-14        | Declared Value             | 5                         |
| Slip Resistance                         | DIN 51130              | -                          | R9                        |
|   | BS-7976-2:2002 Pedulum | -                          | PTV 36+                   |

#### Certifications











