
VT.439 Grip


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Grip	_	
Properties	_	
Chemical Frost Resistant R	UPTO 45% PTV 36+ Recycled Content	
Other formats available		Other finishes available
20mm		
Paver Mosaic		Natural
Sizes available		

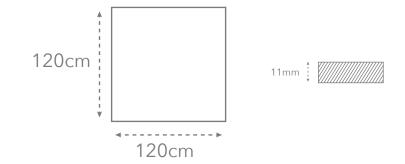

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.439 Grip



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms	
Straightness of sides	IEN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms	
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms	
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.05%	
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²	
Abrasion Resistance	IEN ISO 10545-7	-	4	
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 9*10 ⁻⁶ °C	
Resistance to Thermal Shocks	EN ISO 10545-9	-	Stands the test	
Frost Resistance	EN ISO 10545-12	-	Stands the test	
Resistance to Chemicals	EN ISO 10545-13	UB Min.	Class A	
Resistance to Stains	EN ISO 10545-14	Declared Value	Minimum Class 4	
Slip Resistance	DIN 51130	-	R11	
	BS-7976-2:2002 Pedulum		+36	

Certifications











