# **VT.448BH**

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



## **Bush Hammered**

### **Properties**









60cm













# Recycled Content

#### Other formats














Other finishes

Natural Polished

#### Sizes available





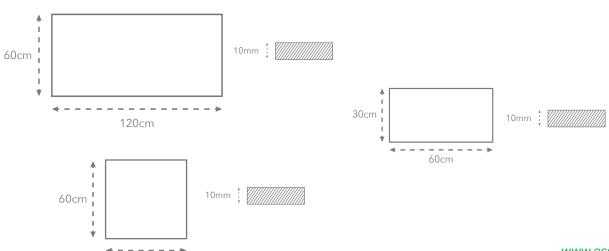

# www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.448BH



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

| Physical & chemical properties          | Norm/test method        | Required Standard                     | Results                               |  |
|---|-------------------------|---------------------------------------|---------------------------------------|--|
| Thickness                               | EN ISO 10545-2          | ± 5.0% / ± 0.5mm                      | ± 5.0%                                |  |
| Length and Width                        | IEN ISO 10545-2         | ± 0.5% / ± 1.5mm                      | ± 0.2%                                |  |
| Rectangularity                          | EN ISO 10545-2          | ± 0.5% / ± 2.0mm                      | ± 0.2%                                |  |
| Warpage                                 | EN ISO 10545-2          | ± 0.5% / ± 2.0mm                      | ± 0.2%                                |  |
| Water absorption                        | EN ISO 10545-3          | ≤ 0.5%                                | ≤ 0.06%                               |  |
| Flexion Resistance                      | EN ISO 10545-4          | ≥ 35 N/mm²                            | ≥ 50 N/mm²                            |  |
| Abrasion Resistance                     | EN ISO 10545-6          | 175mm³                                | 142mm³                                |  |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8          | ≤ 9x10 <sup>-6</sup> °C <sup>-1</sup> | 6.5x10 <sup>-6</sup> °C <sup>-1</sup> |  |
| Frost Resistance                        | EN ISO 10545-12         | UB Min.                               | Resistant                             |  |
| Resistance to Chemicals                 | EN ISO 10545-13         | GB Min                                | Resistant                             |  |
|   | EN ISO 10545-14         | Min Class 3                           | Class 5                               |  |
| Slip Resistance                         | DIN 51130               | -                                     | R11                                   |  |
|   | BS 7976-2:2002 Pendulum | -                                     | PTV 36+                               |  |

#### Certifications













