
VT.448P

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



MOBILE SAMPLE LIBRARY REFERENCE Porcelain Terrazzo Look



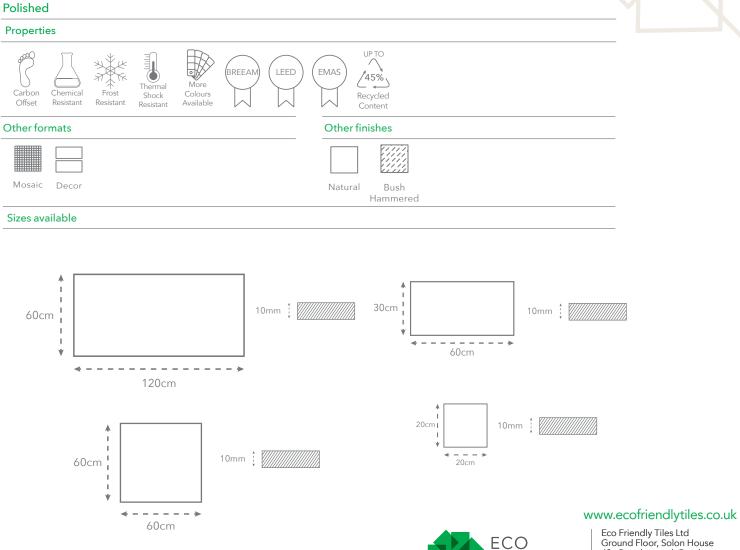

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.448P



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

No was (to at we ath a d	Pequired Standard	Populto	
Norm/test method	Required Standard	Results	
EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%	
IEN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.2%	
EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%	
EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%	
EN ISO 10545-3	≤ 0.5%	≤ 0.06%	
EN ISO 10545-4	≥ 35 N/mm²	≥ 50 N/mm²	
EN ISO 10545-6	175mm ³	142mm ³	
EN ISO 10545-8	≤ 9x10 ⁻⁶ °C ⁻¹	6.5x10 ⁻⁶ °C ⁻¹	
EN ISO 10545-12	UB Min.	Resistant	
Resistance to Chemicals EN ISO 10545-13 EN ISO 10545-14	GB Min	Resistant	
	Min Class 3	Class 5	
DIN 51130	-	-	
BS 7976-2:2002 Pendulum	_	-	
	IEN ISO 10545-2 EN ISO 10545-2 EN ISO 10545-2 EN ISO 10545-3 EN ISO 10545-4 EN ISO 10545-6 EN ISO 10545-12 EN ISO 10545-13 EN ISO 10545-14 DIN 51130	EN ISO 10545-2 ± 5.0% / ± 0.5mm IEN ISO 10545-2 ± 0.5% / ± 1.5mm EN ISO 10545-2 ± 0.5% / ± 2.0mm EN ISO 10545-2 ± 0.5% / ± 2.0mm EN ISO 10545-3 ≤ 0.5% EN ISO 10545-4 ≥ 35 N/mm² EN ISO 10545-6 175mm³ EN ISO 10545-8 ≤ 9x10-6 °C-1 EN ISO 10545-12 UB Min. EN ISO 10545-13 GB Min EN ISO 10545-14 Min Class 3 DIN 51130 -	EN ISO 10545-2 ± 5.0% / ± 0.5mm ± 5.0% IEN ISO 10545-2 ± 0.5% / ± 1.5mm ± 0.2% EN ISO 10545-2 ± 0.5% / ± 2.0mm ± 0.2% EN ISO 10545-2 ± 0.5% / ± 2.0mm ± 0.2% EN ISO 10545-2 ± 0.5% / ± 2.0mm ± 0.2% EN ISO 10545-3 ≤ 0.5% / ± 2.0mm ± 0.2% EN ISO 10545-3 ≤ 0.5% / ± 2.0mm ± 0.2% EN ISO 10545-4 2 50 N/mm² ≤ 0.06% EN ISO 10545-4 ≥ 35 N/mm² ≥ 50 N/mm² EN ISO 10545-6 175mm³ 142mm³ EN ISO 10545-6 2 9×10 ° °C 1 6.5x10 ° °C 1 EN ISO 10545-12 UB Min. Resistant EN ISO 10545-13 GB Min Resistant EN ISO 10545-14 Min Class 3 Class 5 DIN 51130 - -

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.