VT.455


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.






MOBILE SAMPLE LIBRARY REFERENCE

Porcelain Terrazzo Look

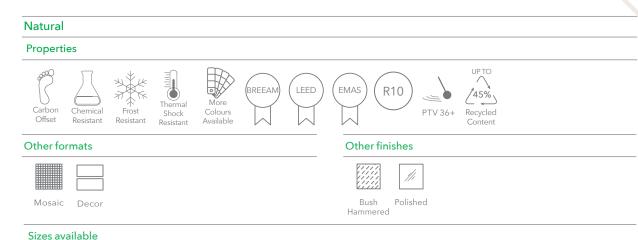

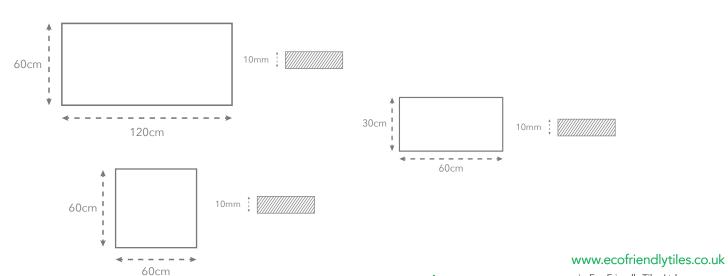



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.455



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

, covered	intowecontendiythes.co.uk
, covereu	www.ecofriendlytiles.co.ul

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%	
Length and Width	IEN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.2%	
Rectangularity	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%	
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.06%	
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 50 N/mm²	
Abrasion Resistance	EN ISO 10545-6	175mm³	142mm³	
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	≤ 9x10 ⁻⁶ °C ⁻¹	6.5x10 ⁻⁶ °C ⁻¹	
Frost Resistance	EN ISO 10545-12	UB Min.	Resistant	
Resistance to Chemicals	EN ISO 10545-13	GB Min	Resistant	
	EN ISO 10545-14	Min Class 3	Class 5	
Slip Resistance	DIN 51130	-	R10	
	BS 7976-2:2002 Pendulum	-	PTV 36+	

Certifications













