

VT.360

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



是为自己的 一致 國	Charles of the Control of the Contro
MOBILE SAMPLE LIBRA	ARY REFERENCE
8	Porcelain Terrazzo Look

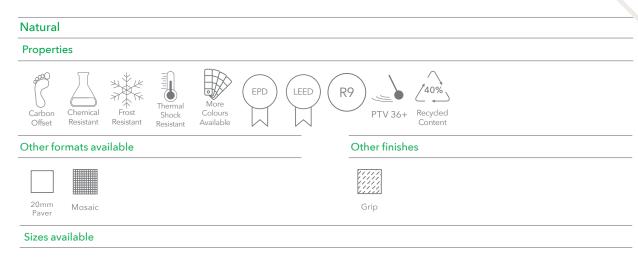

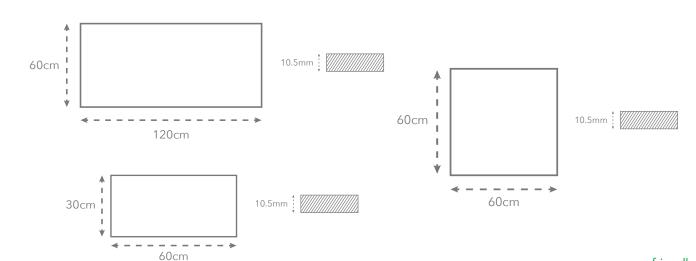

ECO FRIENDLY TILES* The planet, covered

www.ecofriendly tiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.360



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms
Straightness of sides	IEN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²
Impact Resistance	EN ISO 10545-5	-	> 0.75
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 7.1*10 ⁻⁶ °C
Resistance to Thermal Shocks	EN ISO 10545-9	-	Complies
Moisture Expansion	EN ISO 10545-10	-	≤ 0.2mm
Frost Resistance	EN ISO 10545-12	UB Min.	Required
Resistance to Chemicals	EN ISO 10545-13	Declared Value	Class A
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	Minimum Class 5
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	PTV 36+

Certifications











