
VT.351P

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



Polished

Properties























Content

Other formats available

Other finishes




Natural

Sizes available





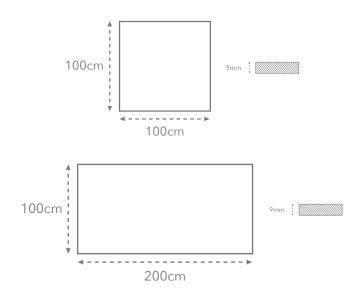

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.351P



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%
Straightness of sides	IEN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.1%
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 0.1%
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	0.05% - 0.08%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	49 N/mm²
Resistsance to Abrasion	EN ISO 10545-6	≤ 175 mm³	≤ 140 mm³
Coefficient of Lineaer Thermal Expansion	EN ISO 10545-8	-	6.5x10 ⁻⁶ °C ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	Resistant	Resistant
Frost Resistance	EN ISO 10545-12	Resistant	Conforms
Resistance to Chemicals	EN ISO 10545-13	B minimum	LB, HB
Resistance to Staining	EN ISO 10545-14	-	Minimum Class 2
Slip Resistance	DIN 51130	-	-
	BS 7976-2:2002 Pendulum	-	

Certifications











