
VT.154G

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

Mosaic

60cm

A

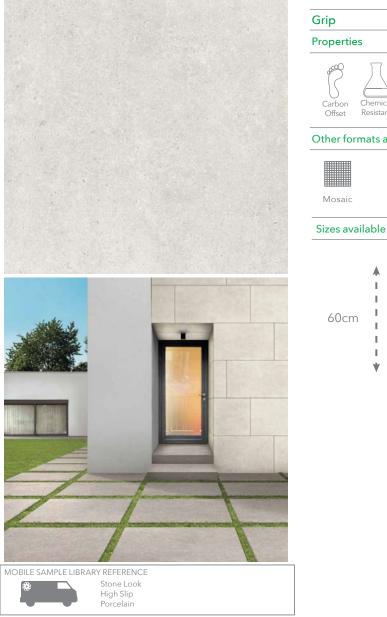

Grip					
Properties					
Carbon Offset	Chemical Resistant	Frost Resistant	Thermal Shock Resistant	More Colours Available	R11
Other fo	rmats ava	ailable			

Other	finisł	nes	avai	labl	е

Natural Honed

Т 1 1 10.5mm Т Т ¥ <---> 90cm н 60cm 10.5mm - > 60cm



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

www.ecofriendlytiles.co.uk

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.154G



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN 0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

EN ISO 10545-3	≤ 0.5%	≤ 0.5%
EN ISO 10545-4	≥ 35 N/mm ²	Conforms
EN ISO 10545-12	-	Frost Proof
EN ISO 10545-13	B Min.	Unaffected
DIN 51130	-	R11
BS 7976-2:2002 Pendulum	-	-
	EN ISO 10545-4 EN ISO 10545-12 EN ISO 10545-13 DIN 51130	EN ISO 10545-4 ≥ 35 N/mm² EN ISO 10545-12 - EN ISO 10545-13 B Min. DIN 51130 -

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.