
VT.163

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Natural

Properties

























PTV 36+


Other formats available

Other finishes available

Sizes available

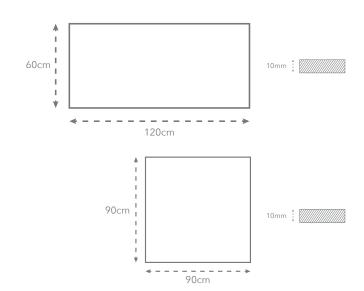





10mm

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.163



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Complies
Straightness of sides	EN ISO 10545-2	± 0.3% / ± 0.8mm	Complies
Rectangularity	EN ISO 10545-2	± 0.3% / ± 1.5mm	Complies
Surface Flatness	EN ISO 10545-2	± 0.4% / ± 1.8mm	Complies
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%
Flexion Resistance	EN ISO 10545-4	$R \ge 35 \text{ N/mm}^2$	≥ 45 N/mm²
Crazing Resistance	EN ISO 10545-11	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	GB Min.	Compliant
Resistance to Stains	EN ISO 10545-14	Min Class 3.	Compliant
Slip Resistance	DIN 51130	-	R10
	BS-7976-2:2002 Pendulum	-	PTV 36+

Certifications













