## VT.186G


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





BUT AND DESCRIPTION OF THE PARTY OF THE PART		
MOBILE SAMPLE L	IBRARY REFERENCE	
	Wood Look High Slip Porcelain	

Properties	
Carbon Chemical Frost Shock Colours Available Resistant	1
Other formats	Other finishes
20mm Decor Paver	Natural

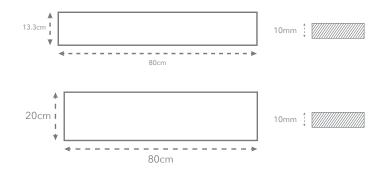

## www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## **Technical Specification** Code: VT.186G



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233

planet, covered	info@ecofriendlytiles.co.uk
	www.ecofriendlytiles.co.u

Physical & chemical properties	Norm/test method	Required Standard	Results
Water absorption	EN ISO 10545-3	≤ 0.5%	0.50%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 35 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	< 170 mm <sup>3</sup>
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	-	GA; GLA: GA
Stains Resistance	EN ISO 10545-14	Class 3 Min.	NDP
Slip Resistance	DIN 51130	-	R11
	BS 7976-2:2002 Pendulum	-	-
Reaction to Fire	96/603/CE	-	A1 fl-A1

## Certifications













