VT.187G


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





	The same of	1000
MOBILE SAMPLE LIBRAR	Y REFERENCE	
	Wood Look High Slip Porcelain	

Grip								
Properti	es							
Carbon Offset	Chemical Resistant	Frost Resistant	Thermal Shock Resistant	More Colours Available	ECO LABEL	R11		
Other fo	rmats						Other finishes	
20mm Paver	Decor						Natural	
Sizes av	ailable							

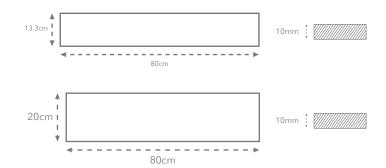

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.187G



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Flexion Resistance Resistance to Deep Abrasion	EN ISO 10545-3 EN ISO 10545-4 EN ISO 10545-6	$\leq 0.5\%$ $\geq 35 \text{ N/mm}^2$ $\leq 175 \text{ mm}^3$	0.50% ≥ 35 N/mm ² < 170 mm ³
Resistance to Deep Abrasion	EN ISO 10545-6		
		≤ 175 mm³	< 170 mm ³
Frost Resistance	ENLICO 10F4F 10		
	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	-	GA; GLA: GA
Stains Resistance	EN ISO 10545-14	Class 3 Min.	NDP
Slip Resistance	DIN 51130	-	R11
	BS 7976-2:2002 Pendulum	-	-
Reaction to Fire	96/603/CE	-	A1 fl-A1

Certifications













