VT.189G


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





Mary or a second contract of the second	TAT OF TAXABLE PARTY.	The second second
MOBILE SAMPLE LIBRA	RY REFERENCE	
	Wood Look High Slip Porcelain	

Grip	
Properties	
Carbon Chemical Frost Shock Colours Resistant	R11
Other formats	Other finishes
20mm Decor Paver	Natural
Sizes available	

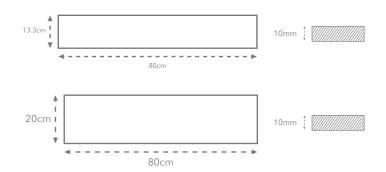

www.ecofriendlytiles.co.uk



Technical Specification Code: VT.189G



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

planet,	covered	info@ecomendiytiles.co.uk
pianci, coccrea	www.ecofriendlytiles.co.u	

Physical & chemical properties	Norm/test method	Required Standard	Results
Water absorption	EN ISO 10545-3	≤ 0.5%	0.50%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 35 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	< 170 mm ³
Frost Resistance	EN ISO 10545-12	EN ISO 10545-12 -	
Resistance to Chemicals	EN ISO 10545-13	-	GA; GLA: GA
Stains Resistance	EN ISO 10545-14	Class 3 Min.	NDP
Slip Resistance	DIN 51130	-	R11
	BS 7976-2:2002 Pendulum	-	-
Reaction to Fire	96/603/CE	-	A1 fl-A1

Certifications











