VT.237SP


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.









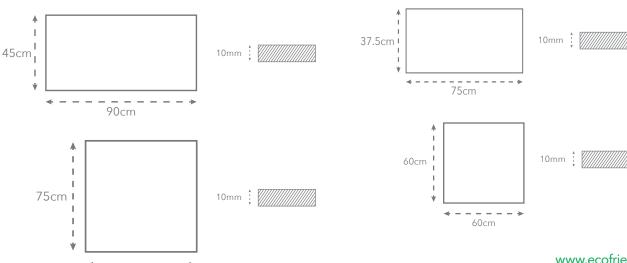

75cm

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.237SP



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Complies
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Complies
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Complies
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Complies
Water absorption	EN ISO 10545-3	≤ 0.5%	Complies
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	Complies
Resistance to Surface Abrasion	EN ISO 10545-7	-	Complies
Crazing Resistance	EN ISO 10545-11	-	Required
Frost Resistance	EN ISO 10545-12	-	Required
Resistance to Chemicals	EN ISO 10545-13	GB Min	GB Min.
Stain Resistance	EN ISO 10545-14	Class 3 Min.	Min Class 3.
Slip Resistance	DIN 51130	-	-
	BS 7976-2:2002 Pendulum	-	-

Certifications













