VT.257


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.


30cm


60cm







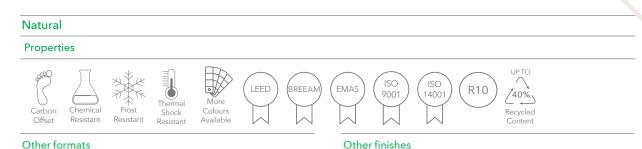

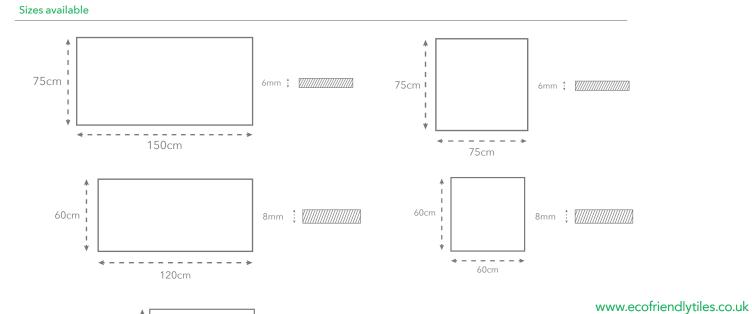



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.257



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% max	± 5%	
Length and Width	IEN ISO 10545-2	± 0.6% max	± 0.1%	
Linearity	EN ISO 10545-2	± 0.5%	± 0.1%	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%	
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%	
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	49 N/mm²	
Abrasion Resistance	EN ISO 10545-6	max 175mm³	140mm³	
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	6.5X10 ⁻⁶ °C ⁻¹	
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant	
Frost Resistance	EN ISO 10545-12	UB Min.	Conforms	
Resistance to Chemicals	EN ISO 10545-13	UB Min	Conforms	
Stain Resistance	EN ISO 10545-14	-	Conforms	
Slip Resistance	DIN 51130	-	R10	
	BS 7976-2:2002 Pendulum	-	-	

Certifications













