## **VT.288**

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.


Sizes available










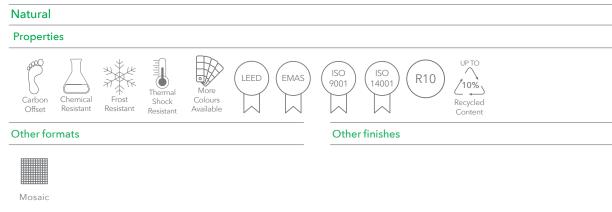



## www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.288



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

. covered	imocccomenary mes.co.ak
, covereu	www.ecofriendlytiles.co.ul

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.5%
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 1 mm
Planarity	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.25%
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 45 N/mm²
Deep Abrasion Resistance	EN ISO 10545-7	≤ 175 mm²	≤ 145 mm²
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	UB Min	UA; ULA; UHA
Stains Resistance	EN ISO 10545-14	Class 3 Min.	Class 5
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	-

## Certifications













