VT.290P

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

Polished Properties







MOBILE SAMPLE LIBRARY REFERENCE

Stone Look Polished

Porcelain

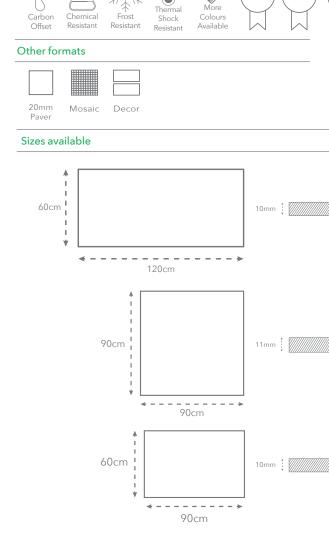



ISO 9001

LEED

EMAS

ISO

14001

Other finishes

Natural

140%

Recycled

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.290P



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Compliant
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Compliant
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Compliant
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Compliant
Water absorption	EN ISO 10545-3	≤ 0.5%	0.05%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 50 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	145 mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 7*10 ⁻⁶ °C ⁻¹
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	-	LA, HA Resistant
Stains Resistance	EN ISO 10545-14	Class 3 Min.	5 Resistant
Slip Resistance	DIN 51130	-	-
	BS 7976-2:2002 Pendulum	-	-

Certifications













