VT.323P

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.








Properties Carbon Chemical Frost Shock Colours Offset Resistant R


Other formats available Other finishes

Natural

Sizes available

Mosaic

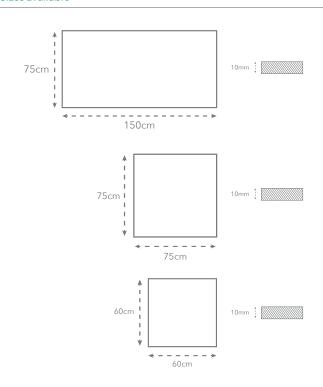



www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.323P



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

et, covered www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms	
Straightness of sides	IEN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms	
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms	
Water absorption	EN ISO 10545-3	≤ 0.5%	Conforms	
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	Conforms	
Breaking Strength	EN ISO 10545-4	≥ 7.5mm: 1300N min.	Conforms	
Crazing Resistance	EN ISO 10545-11	-	Conforms	
Frost Resistance	EN ISO 10545-12	UB Min.	Resistant	
Resistance to Chemicals	EN ISO 10545-13	Declared Value	Resistant	
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	Conforms	
Slip Resistance	DIN 51130	-	-	
	BS 7976-2:2002 Pendulum	-	-	

Certifications













