VT.334

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Natural

Properties














Other formats available

Other finishes



Mosaic

Sizes available

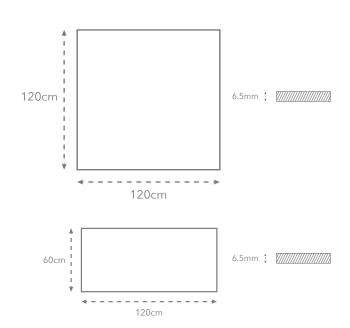

www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.334



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

planet,	covered	info@ecofriendlytiles.co.uk
<i>I</i> ,		www.ecofriendlytiles.co.u

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 3%
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.6mm
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 2 mm
Length and Width	EN ISO 10545-2	± 0.6%	± 0.9mm
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 50 N/mm²
Resistsance to Abrasion	EN ISO 10545-6	≤ 175 mm³	≤ 145 mm³
Resistance to Thermal Shocks	EN ISO 10545-9	Resistant	Resistant
Frost Resistance	EN ISO 10545-12	Resistant	Frost Proof
Resistance to Chemicals	EN ISO 10545-13	UB minimum	UA; ULA; UHA
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	Class 5
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	-

Certifications













