## **VT.352**

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







### Natural

#### **Properties**














Other finishes

#### Other formats available

Mosaic

#### Sizes available

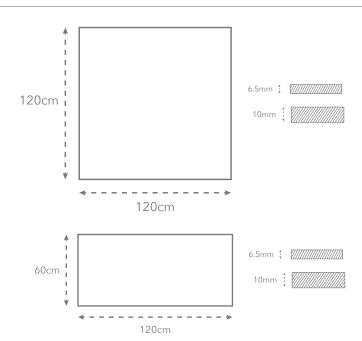

## www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# **Technical Specification** Code: VT.352



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 3%	
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.6mm	
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 2 mm	
Length and Width	EN ISO 10545-2	± 0.6%	± 0.9mm	
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%	
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 50 N/mm²	
Resistsance to Abrasion	EN ISO 10545-6	≤ 175 mm³	≤ 145 mm³	
Resistance to Thermal Shocks	EN ISO 10545-9	Resistant	Resistant	
Frost Resistance	EN ISO 10545-12	Resistant	Frost Proof	
Resistance to Chemicals	EN ISO 10545-13	UB minimum	UA; ULA; UHA	
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	Class 5	
Slip Resistance	DIN 51130	-	R10	
	BS 7976-2:2002 Pendulum	-	-	

#### Certifications













