VT.408

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

Natural Properties

Carbon






MOBILE SAMPLE LIBRARY REFERENCE

Stone Look High Slip

Porcelain

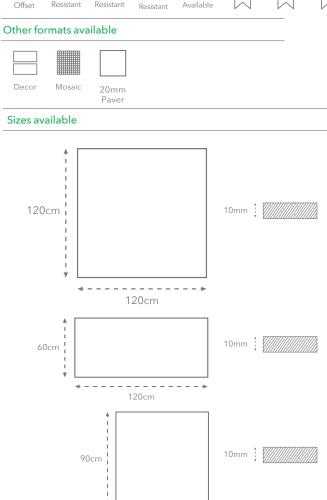

90cm


ECO LABEL


LEED

More

Colours

Shock







www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.408



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Compliant	
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Compliant	
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Compliant	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Compliant	
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%	
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 45 N/mm²	
Cracking Resistance	EN ISO 10545-11	-	Resistant	
Frost Resistance	EN ISO 10545-12	-	Resistant	
Resistance to Chemicals	EN ISO 10545-13	UB Min.	Compliant	
Resistance to Stains	EN ISO 10545-14	Declared Value	Compliant	
Slip Resistance	DIN 51130	-	R10	
	BS 7976-2:2002 Pendulum	-	-	

Certifications













