
VT.409

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Natural **Properties** ECO LABEL ISO LEED ¹20% , 9001 More Recycled Carbon Colours Shock Content Available Other formats available Other finishes

















Bush Structured Hammered

Sizes available

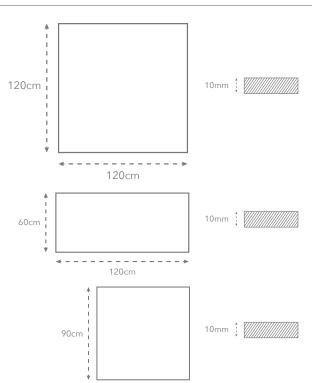

90cm



www.ecofriendlytiles.co.uk Eco Friendly Tiles Ltd Ground Floor, Solon House

40a Peterborough Road FRIENDLY London TILES® The planet, covered

SW6 3BN 0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.409



R10

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Compliant
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Compliant
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Compliant
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Compliant
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 45 N/mm²
Cracking Resistance	EN ISO 10545-11	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	UB Min.	Compliant
Resistance to Stains	EN ISO 10545-14	Declared Value	Compliant

Certifications

Slip Resistance















DIN 51130

BS 7976-2:2002 Pendulum