
VT.437PAV


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







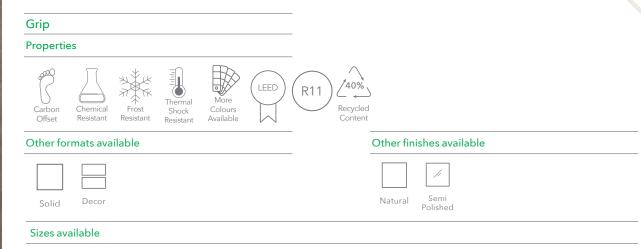

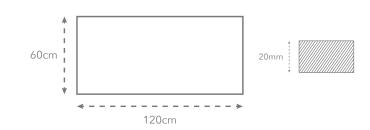





Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.437PAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results |
|---|-------------------------|-------------------|----------------------------|
| Thickness | EN ISO 10545-2 | ± 5.0% / ± 0.5mm | Conforms |
| Straightness of sides | EN ISO 10545-2 | ± 0.5% / ± 1.5mm | Conforms |
| Rectangularity | EN ISO 10545-2 | ± 0.6% / ± 2.0mm | Conforms |
| Warpage | EN ISO 10545-2 | ± 0.5% / ± 2.0mm | Conforms |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.3% |
| Flexion Resistance | EN ISO 10545-4 | AR ≥ 35 N/mm² | 7mm ≥ 40 N/mm ² |
| | | | 9mm ≥ 45 N/mm ² |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | - | < 9*10 ⁻⁶ °C |
| Resistance to Thermal Shocks | EN ISO 10545-9 | - | Stands the test |
| Frost Resistance | EN ISO 10545-12 | - | Stands the test |
| Resistance to Chemicals | EN ISO 10545-13 | UB Min. | Class GA/GLA |
| Resistance to Stains | EN ISO 10545-14 | Declared Value | Minimum Class 4 |
| Slip Resistance | DIN 51130 | - | R11 |
| | BS-7976-2:2002 Pendulum | - | - |

Certifications











