



VT.438

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

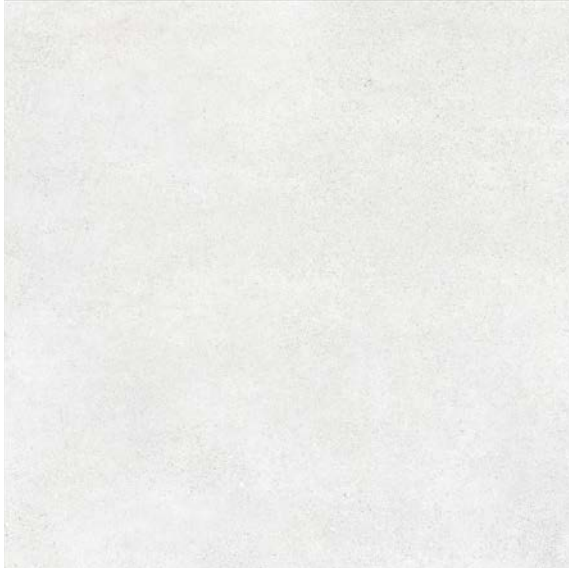


Natural

Properties




Other formats available



Other finishes available



Sizes available

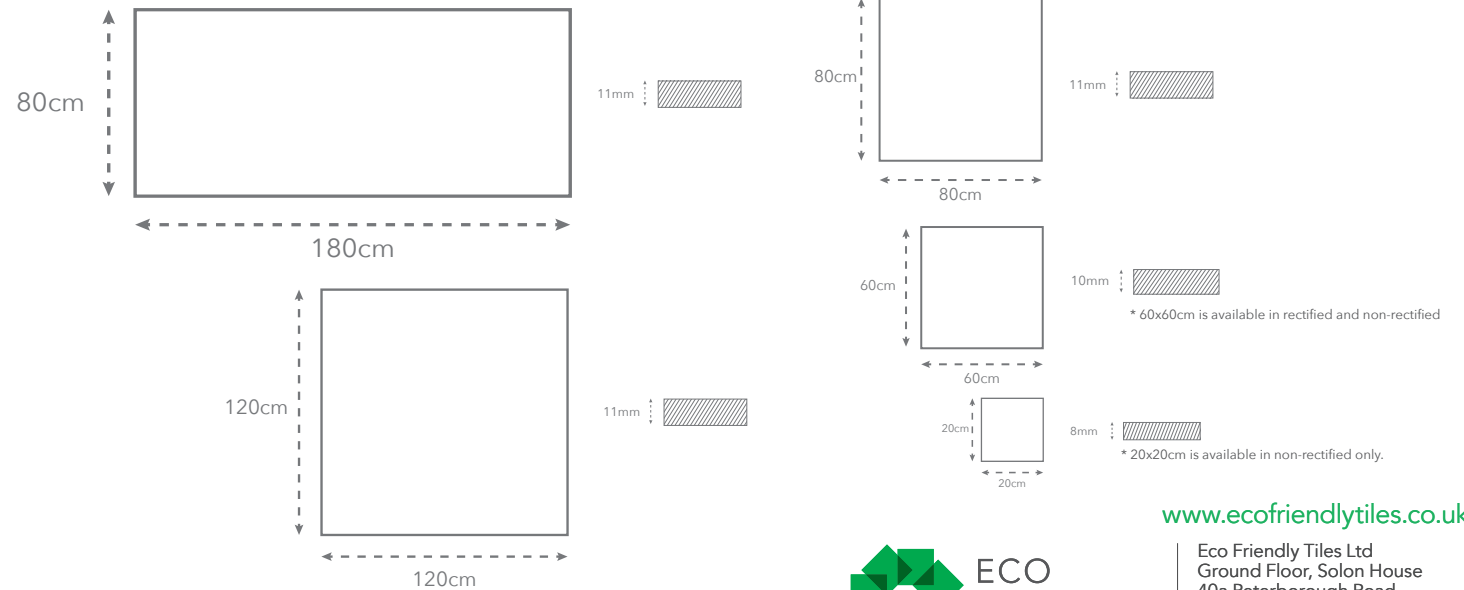

MOBILE SAMPLE LIBRARY REFERENCE



Designer Series
Concrete
Porcelain



ECO FRIENDLY TILES®

The planet, covered

www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN


0844 980 2233
info@ecofriendlytiles.co.uk

Accents


Product Codes EE.571 to EE.584 are 20x20cm, 8mm thick porcelain tiles that can be used on their own or as an accent to match product codes VT.438 to VT.441 20x20cm, 8mm styles. As pictured below they are available as a box of an individual design or a random mixed set. Please reference the product code associated with the tile below and our Eco Friendly Tiles member will happily provide you with a product sheet and larger in-situ images.



EE.571
20x20cm

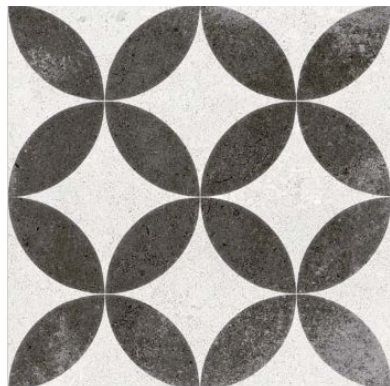

EE.572
20x20cm

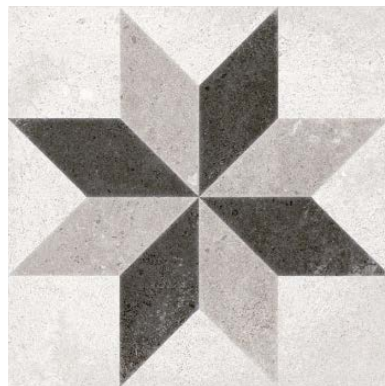

EE.573
20x20cm



EE.574
20x20cm




EE.575
20x20cm




EE.576
20x20cm
*These packs come in a box of 25 with a mixture of these 16 designs.




EE.577
20x20cm
*These packs come in a box of 25 with a mixture of these 16 designs.

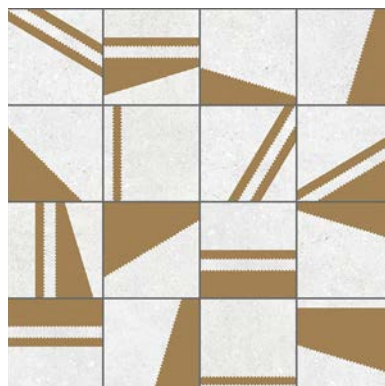

EE.578
20x20cm
*These packs come in a box of 25 with a mixture of these 10 designs.

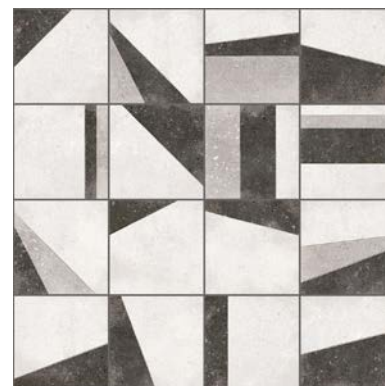

EE.583
20x20cm
*These packs come in a box of 25 with a mixture of these 16 tiles.

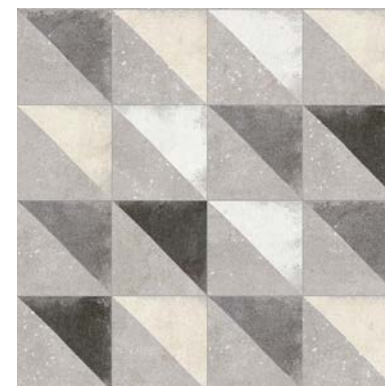

EE.584
20x20cm
*These packs come in a box of 25 with a mixture of these 4 tiles.

** Please note our exclusive range is not available online. Please contact an Eco Friendly Tiles team member and quote the product code associated with the tile above so we can provide you with a product sheet and larger in-situ images.

Technical Specification

Code: VT.438



Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk
www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm ²	≥ 35 N/mm ²
Abrasion Resistance	IEN ISO 10545-7	-	4
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 9*10 ⁻⁶ °C
Resistance to Thermal Shocks	EN ISO 10545-9	-	Stands the test
Frost Resistance	EN ISO 10545-12	-	Stands the test
Resistance to Chemicals	EN ISO 10545-13	UB Min.	Class A
Resistance to Stains	EN ISO 10545-14	Declared Value	Minimum Class 4
Slip Resistance	DIN 51130	-	R10
	BS-7976-2:2002 Pendulum	-	PTV 36+

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.