## **VT.495**


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.









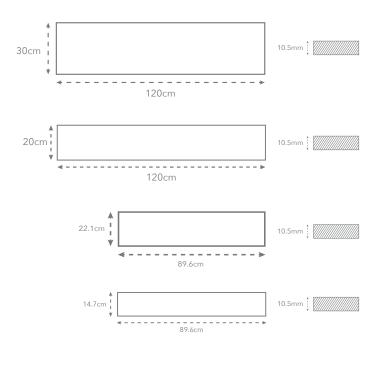



## www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.495



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

he planet, covered	into@ecotrienalytiles.
ne pianei, cocerca	www.ecofriendlytil
	'

Physical & chemical properties	Norm/test method	Required Standard	Results
Dimensional Characteristics	EN ISO 10545-2	-	Compliant
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.05%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²
Impact Resistance	EN ISO 10545-5	-	e > 0.80
Abrasion Resistance	EN ISO 10545-7	-	< 7.1*10 <sup>-6</sup> °C <sup>-1</sup>
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	Conforms
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Moisture Expansion	EN ISO 10545-10	-	< 0.6%
Resistance to Crazing	EN ISO 10545-11	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	-	GLA-GHA
Resistance to Stains	EN ISO 10545-14	Class	≥ 4
Slip Resistance	DIN 51130	Declared Value	R10
	BS 7976-2:2002 Pendulum	-	-
		-	

## Certifications











