VT.339P

Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Properties Properties Carbon Chemical Frost Shock Resistant Resistant Resistant Resistant Available Other formats available Other finishes

Natural

Grip


9.5mm :

60cm

Sizes available

Decor

Mosaic

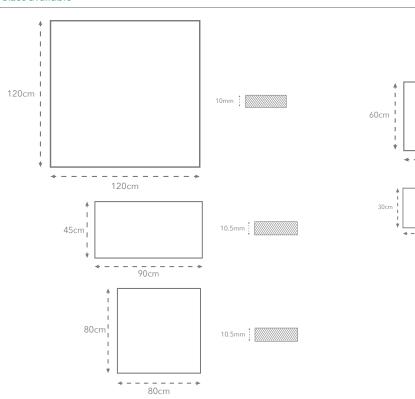

www.ecofriendlytiles.co.uk

ECO
FRIENDLY
TILES®

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN

The planet, covered

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.339P



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

			www.ecomenarythes.co.uk
ysical & chemical properties	Norm/test method	Required Standard	Results
ickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms	
Straightness of sides	IEN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms	
Rectangularity	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms	
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms	
Water absorption	EN ISO 10545-3	≤ 0.5%	Conforms	
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	Conforms	
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	7x10 ⁻⁶ °C ⁻¹	
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant	
Frost Resistance	EN ISO 10545-12	UB Min.	Resistant	
Resistance to Chemicals	EN ISO 10545-13	Declared Value	Resistant	
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	Conforms	
Slip Resistance	DIN 51130	-	-	
	BS 7976-2:2002 Pendulum	-	-	

Certifications











