## 6.2.A(2)G

Lots of finishes in lots of colours, and each tile with an eco-advantage. From lighter shades to deep, rich colours, there's versatility aplenty whatever the setting in our Volta Range thanks to multiple sizes and slip ratings. Some tiles include 40% pre-or-post consumer recycled content...but all carry impressive environmental certification.






MOBILE SAMPLE LIBRARY REFERENCE

Stone Look High Slip


Porcelain

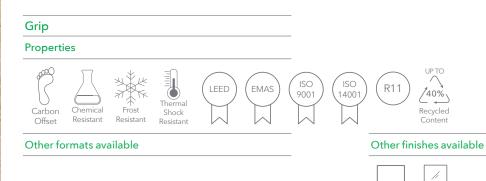

Natural

Polished



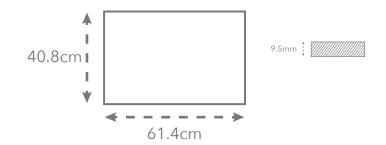





Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: 6.2.A(2)G



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results	
Thickness	ISO 10545-2	± 5.0% / ±0.5mm	Conforms	
Straightness of sides	ISO 10545-2	± 0.5% / ± 1.5mm	Conforms	
Rectangularity	ISO 10545-2	± 0.5% / ± 2.0mm	Conforms	
Flatness	ISO 10545-2	± 0.5% / ± 2.0mm	Conforms	
Water absorption	ISO 10545-3	≤ 0.5%	Conforms	
Average Bending Strength	ISO 10545-4	35 N/mm² min.	Conforms	
Frost Resistance	ISO 10545-12	-	Required	
Resistance to Chemicals	ISO 10545-13	GB min.		
Slip Resistance	DIN 51130		R11	
	BS 7976-2:2002 Pendulum			

## Certifications











