

## 6.2.A(2)PAV

Lots of finishes in lots of colours, and each tile with an eco-advantage. From lighter shades to deep, rich colours, there's versatility aplenty whatever the setting in our Volta Range thanks to multiple sizes and slip ratings. Some tiles include 40% pre-or-post consumer recycled content...but all carry impressive environmental certification.





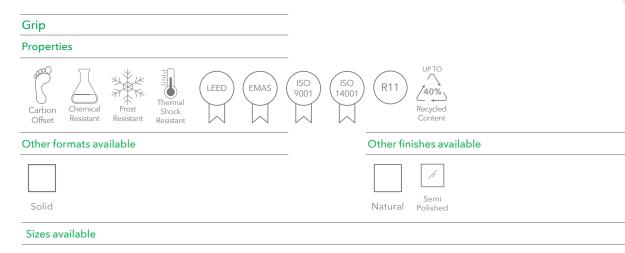



MOBILE SAMPLE LIBRARY REFERENCE
Stone Look
High Slip
Porcelain

ECO FRIENDLY TILES® The planet, covered

## www.ecofriendlytiles.co.uk Eco Friendly Tiles Ltd Ground Floor, Solon House

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: 6.2.A(2)PAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	ISO 10545-2	± 5.0% / ±0.5mm	Conforms
Straightness of sides	ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Rectangularity	ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Flatness	ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	ISO 10545-3	≤ 0.5%	Conforms
Average Bending Strength	ISO 10545-4	35 N/mm² min.	Conforms
Frost Resistance	ISO 10545-12	-	Required
Resistance to Chemicals	ISO 10545-13	GB min.	
Slip Resistance	DIN 51130		R11
	BS 7976-2:2002 Pendulum		

## Certifications











