### **VT.65SP**


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







# Properties Carbon Chemical Frost Resistant Resistant Resistant Resistant Available Other formats available Decor Sizes available Properties BREEAM (ISO) (ISO) (26%) (Recycled Content) Other finishes available Sizes available

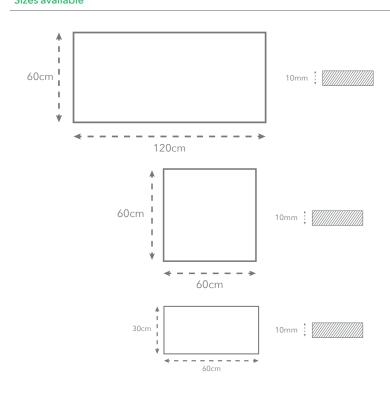



#### www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.65SP



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

			<u> </u>
Physical & chemical properties	Norm/test method	Required Standard	Results
Dimensions-Length and width	EN ISO 10545-2	±0.6% / ± 2.0mm	Conforms
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Corner Squareness	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Flatness	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Thickness	EN ISO 10545-2	±5% / ±0.5mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	Conforms
Breaking Strength	EN ISO 10545-4	≥1300 se sp ≥7.5mm	Conforms
Modulus of Rupture	EN ISO 10545-4	≥35N/mm²	Conforms
Resistance to Abrasion	EN ISO 10545-6	≤175mm³	Conforms
Coeff. of Linear Thermal Expansion	EN ISO 10545-8	-	7.0
Thermal Shock Resistance	EN ISO 10545-9	Request	Conform
Frost Resistance	EN ISO 10545-12	Request	Resistant
Resistance to Chemicals	EN ISO 10545-13	В	Conforms
Colour Stability	DIN 51094	Request	Resists
Slip Resistance	DIN 51130	-	-
	BS-7976-2:2002 Pendulum		-

#### Certifications













