
## **VT.65S**


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







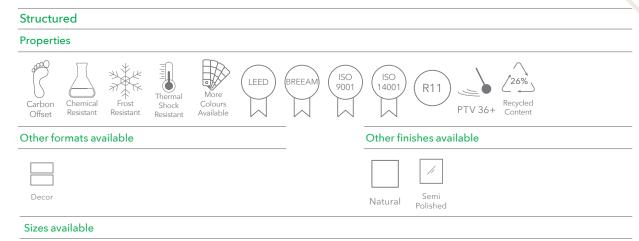

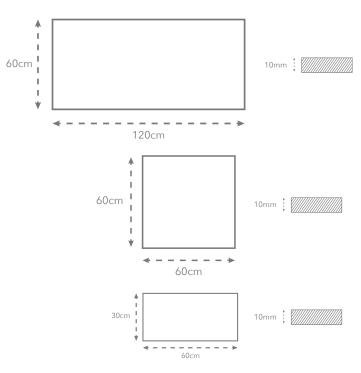



## www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.65S



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

0545-2 0545-2 0545-2	Required Standard $\pm 0.6\% / \pm 2.0 \text{mm}$ $\pm 0.5\% / \pm 1.5 \text{mm}$ $\pm 0.5\% / \pm 2.0 \text{mm}$ $\pm 0.5\% / \pm 2.0 \text{mm}$ $\pm 5\% / \pm 0.5 \text{mm}$	Results  Conforms  Conforms  Conforms  Conforms  Conforms
0545-2 0545-2 0545-2	± 0.5% / ± 1.5mm ± 0.5% / ± 2.0mm ± 0.5% / ± 2.0mm	Conforms Conforms Conforms
0545-2 0545-2	± 0.5% / ± 2.0mm ± 0.5% / ± 2.0mm	Conforms Conforms
0545-2 0545-2	± 0.5% / ± 2.0mm	Conforms
)545-2		
	±5% / ±0.5mm	Conforms
E4E 2		
343-3	≤ 0.5%	Conforms
)545-4	≥1300 se sp ≥7.5mm	Conforms
)545-4	≥35N/mm²	Conforms
)545-6	≤175mm³	Conforms
)545-8	-	7.0
)545-9	Request	Conform
)545-12	Request	Resistant
)545-13	В	Conforms
4	Request	Resists
)	-	R11
2:2002 Pendulum		PTV 36+
) )	1545-4 1545-6 1545-8 1545-9 1545-12 1545-13	2545-4 ≥1300 se sp ≥7.5mm  2545-4 ≥35N/mm²  2545-6 ≤175mm³  2545-8 -  2545-9 Request  2545-12 Request  2545-13 B  4 Request  1 Request  1 Request  1 Request  1 Request

## Certifications













