
6.17.A

Lots of finishes in lots of colours, and each tile with an eco-advantage. From lighter shades to deep, rich colours, there's versatility aplenty whatever the setting in our Volta Range thanks to multiple sizes and slip ratings. Some tiles include 40% pre-or-post consumer recycled content...but all carry impressive environmental certification.








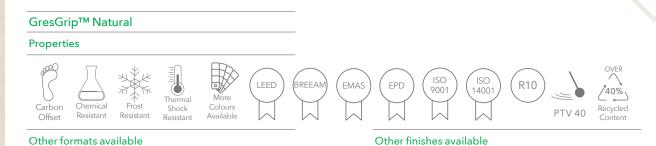

Sizes available

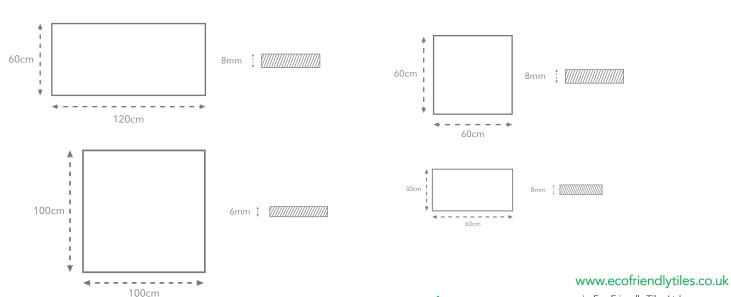

ECO Eco Friendly Tiles Ltd Ground Floor, Solon House



Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: 6.17.A



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Length and Width	EN ISO 10545-2	± 0.6% max	±0.2% max
Thickness	EN ISO 10545-2	±5.0% max	±5.0% max
Linearity	EN ISO 10545-2	±0.5% max	±0.2% max
Wedging	EN ISO 10545-2	±0.6% max	±0.2% max
Warpage	EN ISO 10545-2	±0.5% max	±0.2% max
Water Absorption	EN ISO 10545-3	≤0.5%	<0.05%
Bending Strength	EN ISO 10545-4	≥35 N/mm²	> 48 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤175 N/mm²	≤140mm²
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK ⁻¹
Thermal Shock Resistance	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Frost Resistance
Chemical Resistance	EN ISO 10545-13	UB min.	Unaffected
Stain Resistance	EN ISO 10545-14	-	class 5
Colour Resistance to Light	DIN 51094	-	No change in brightness or colour
Slip Resistance	DIN51130	-	R10
	BS 7976-2:2002 Pendulum	-	PTV 40+

Certifications











