
6.11.B

Lots of finishes in lots of colours, and each tile with an eco-advantage. From lighter shades to deep, rich colours, there's versatility aplenty whatever the setting in our Volta Range thanks to multiple sizes and slip ratings. Some tiles include 40% pre-or-post consumer recycled content...but all carry impressive environmental certification.







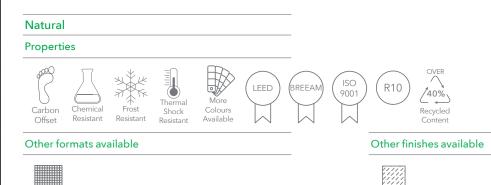


Bush

Hammered

Sizes available

Mosaic

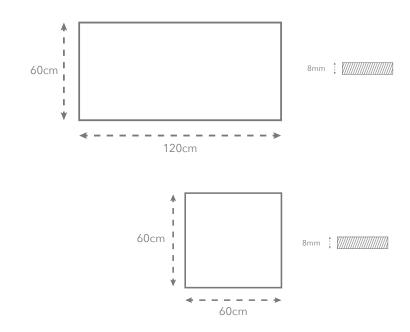

www.ecofriendlytiles.co.uk



60cm

30cm

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: 6.11.B



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Norm/test method	Required Standard	Results
EN ISO 10545-2	± 0.6% max	±0.2% max
EN ISO10545-2	±5.0% max	±5.0% max
EN ISO 10545-3	≤0.5%	<0.05%
EN ISO 10545-4	≥35N/mm²	>42N/mm²
EN ISO 10545-6	≤175N/mm²	140mm²
EN ISO 10545-8	-	7MK ⁻¹
EN ISO 10545-9	-	Resistant
EN ISO 10545-12	-	Frost Resistance
EN ISO 10545-13	UB min.	Unaffected
DIN51130	-	R10
BS 7976-2:2002 Pendulum	-	-
	EN ISO 10545-2 EN ISO 10545-3 EN ISO 10545-4 EN ISO 10545-6 EN ISO 10545-8 EN ISO 10545-9 EN ISO 10545-12 EN ISO 10545-13 DIN51130	EN ISO 10545-2 ± 0.6% max EN ISO 10545-2 ±5.0% max EN ISO 10545-3 ≤0.5% EN ISO 10545-4 ≥35N/mm² EN ISO 10545-6 ≤175N/mm² EN ISO 10545-8 - EN ISO 10545-9 - EN ISO 10545-12 - EN ISO 10545-13 UB min. DIN51130 -

Certifications











