## **VT.360**


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.









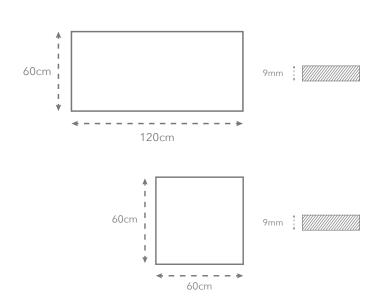





## www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## **Technical Specification** Code: VT.360



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Dimensions	EN ISO 10545-2	-	Complies
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Flexion Resistance	EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 35 N/mm²
Breaking Strength	EN ISO 10545-4	≥ 1300 N for thickness ≥ 7.5mm	Complies
Impact Resistance	EN ISO 10545-5	-	> 0.75
Abraision Resistance	EN ISO 10545-7	-	Class 0-5
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 7.1*10 <sup>-6</sup> °C
Resistance to Thermal Shocks	EN ISO 10545-9	-	Complies
Moisture Expansion	EN ISO 10545-10	-	≤ 0.2mm
Crazing Resistance	EN ISO 10545-11	-	Complies
Frost Resistance	EN ISO 10545-12	UB Min.	Complies
Resistance to Chemicals	EN ISO 10545-13	Declared Value	Class A
Resistance to Staining	EN ISO 10545-14	Minimum Class 3	≥ 4
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

## Certifications













