8.1.C(2)

Breathe easy. Alive with innovation, here's the crossing point between creativity and science. Its where low carbon meets lower emissions - LEED and BREEAM certifications throughout the range. Eco Friendly Tiles Jurong Range is a stunning way to add detail like wood and fabric looks to your project.







Natural

Properties











∢--- ➤ 20cm











Other finishes available

Other formats available






26.5cm

Mosaic Decor

Sizes available

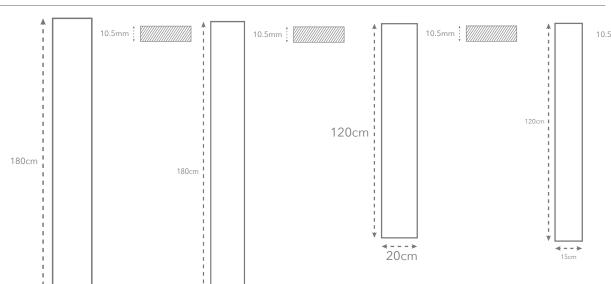



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk www.ecofriendlytiles.co.uk

Technical Specification Code: 8.1.C(2)



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	0.5% / ± 0.5mm	Conforms
Length and Width	EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
Straightness of sides	EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
Corner Squareness	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Flatness	EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
Water absorption	EN ISO 10545-3	≤ 0.5%	Conforms
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	Conforms
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	≥7.0 °MK (-1)
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	B Min.	Resistant
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

Certifications













