VT.192PAV


Our Cascade Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.









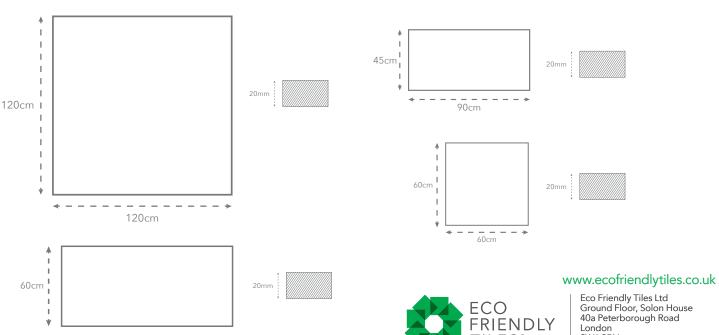

120cm

TILES® The planet, covered

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.192PAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

planet, cove	avad	occomendity in	C3.CO.UK
ршнег, соог	w	vw.ecofriendly	ytiles.co.ı

Physical & chemical properties	Norm/test method	Required Standard	Results
Sides	EN ISO 10545-2	± 0.3% / ± 1.0mm	Complies
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	Complies
Straightness of Sides	EN ISO 10545-2	± 0.3% / ± 0.8mm	Complies
Surface Flatness	EN ISO 10545-2	± 0.3% / ± 1.5mm	Complies
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.1%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 48 N/mm²
Impace Resistance	EN ISO 10545-5	-	> 0.80
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	< 150 mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	6.6*10 ⁻⁶ C ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	-	No Damage
Frost Resistance	EN ISO 10545-12	-	No Damage
Resistance to Chemicals	EN ISO 10545-13	-	A; LA; HA
Stains Resistance	EN ISO 10545-14	Class 3 Min.	5
Slip Resistance	DIN 51130	-	R11
	BS 7976-2:2002 Pendulum	-	PTV 36+

Certifications













