


VS.30P

Ultra-thin - from just 3.5mm - yet so strong it can be laid in 3m x 1m slabs on floors, walls or as an overlay. With low embodied carbon, up to 40% pre-consumer recycled content, flexible sizes and over one hundred colours and finishes, it's time to join the surface revolution. With a LEED and EPD certifications, it's a range perfectly in step with 21st century living.

To see the full range or download the Brochure, visit: www.ecofriendlytiles.co.uk/eco/surface-brochure

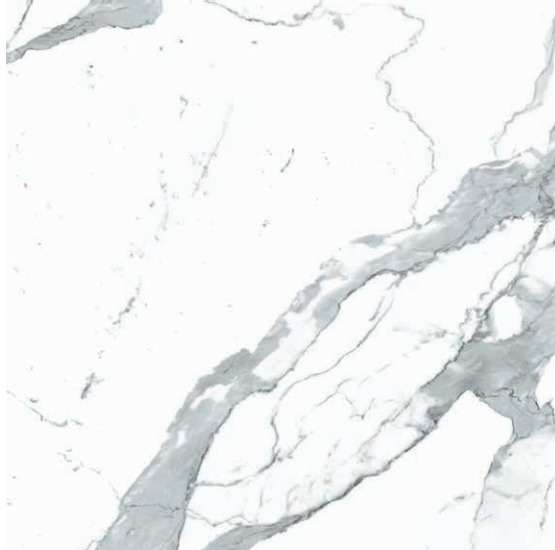

Polished

Properties



Carbon Offset



Chemical Resistant



Frost Resistant



Thermal Shock Resistant



More Colours Available



BREEAM



EPD



LEED



SKA



ISO 14001



UP TO 20% Recycled Content



Pre Consumer Recycled Content

Other formats

Other finishes




Natural

Sizes available in

Sizes available in

5.6mm ↓  Floor / Wall / Overlay

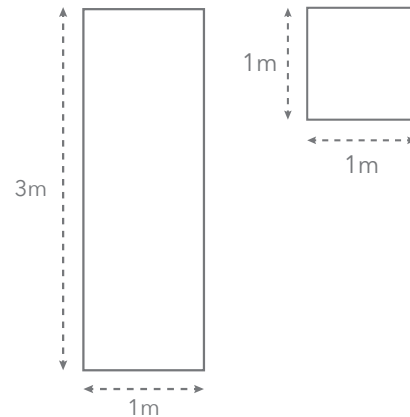

www.ecofriendlytiles.co.uk

FOR OFFICE USE ONLY



Marble Look
Large Format
BREEAM/LEED



ECO FRIENDLY FACADES
Facade Code: 030 Statuario Marble
www.ecofriendlyfacades.co.uk



ECO FRIENDLY TILES®
The planet, covered

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN

0844 980 2233
info@ecofriendlytiles.co.uk
ecofriendlytiles.co.uk

Technical Specification

Code: VS.30P



Eco Friendly Tiles Limited
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk
www.ecofriendlytiles.co.uk

Certifications



Physical & chemical properties

Norm/test method

Shannon 5.6mm Polished

Straightness of sides	ISO 10545-2	Max. deviation on the side +/- 0.5mm
Difference between diagonals	Factory	Minimum size: $\geq 1210 \times 3050$ mm
Weight	Factory	Minimum size: $\geq 1630 \times 3250$ mm
Surface quality/% of tiles with no visible flaws	ISO 10545-2	Max. +/- 1.5mm
Water absorption	ISO 10545-3 / ASTM C373	Average value 14.5kg/m ²
Breaking strength in N (samples 200x300mm)	ISO 10545-4	> 95%
Modulus of rupture in N/mm ² (samples 200x300mm)	ISO 10454-4	Average Value $\leq 0.1\%$
Resistance to deep abrasion	ISO 10545-6	Average value 1100
Coefficient of linear thermal expansion / $10^{-6} / 0^{\circ}$	ISO 10545-8	Average value 50
Resistance to thermal shock	ISO 10545-9	$\leq 175\text{mm}^3$
Resistance to freeze-thaw	ISO 10545-12	Average value 6.6
Chemical resistance	ISO 10545-13	Compliant
Stain resistance	ISO 10545-14	Compliant
Coefficient of friction	DIN 51130	Class: from A to C
	BS 7976-2:2002 Pendulum	Class: from 2 to 5
Fire reaction	EN 13501 (rev. 2005)	-
		-
		A1 (decision 96/603/CE as amended)