VT.385SP 6mm

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.


Decor


Mosaic

Sizes available








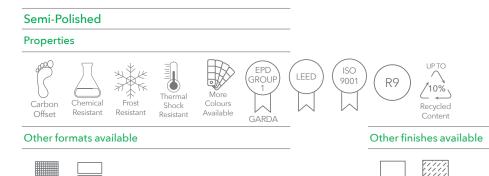

Natural

Grip

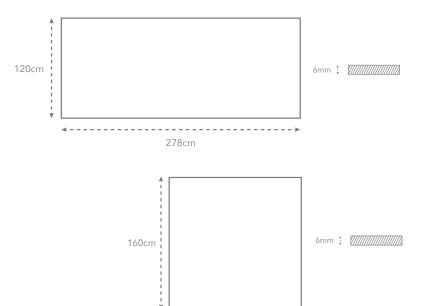

160cm

ECO FRIENDLY TILES® The planet, covered

www.ecofriendly tiles.co.uk


Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

VT.385SP 9mm

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



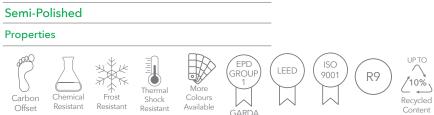











Other formats available







Natural


Grip


Other finishes available

Sizes available



EPD Group 1 - Garda Range

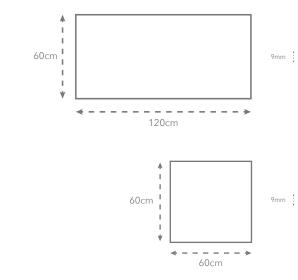



www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.385SP



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results |
|---|-------------------------|---------------------------|---------------------------|
| Thickness | EN ISO 10545-2 | ± 5.0% / ± 0.5mm | Conforms |
| Straightness of sides | IEN ISO 10545-2 | ± 0.3% / ± 1.0mm | Conforms |
| Rectangularity | EN ISO 10545-2 | ± 0.3% / ± 2.0mm | Conforms |
| Surface Flatness | EN ISO 10545-2 | ± 0.4% / ± 1.8mm | Conforms |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.1% |
| Flexion Resistance | EN ISO 10545-4 | $R \ge 35 \text{ N/mm}^2$ | ≥ 48 N/mm² |
| Impact Resistance | EN ISO 10545-5 | - | > 0.80 |
| Abrasion Resistance | EN ISO 10545-6 | ≤ 175mm² | < 150mm ² |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | - | < 6.6*10 ⁻⁶ °C |
| Resistance to Thermal Shocks | EN ISO 10545-9 | - | No Damage |
| Frost Resistance | EN ISO 10545-12 | - | No Damage |
| Resistance to Chemicals | EN ISO 10545-13 | UB Min. | A LA HA |
| Resistance to Stains | EN ISO 10545-14 | Declared Value | 5 |
| Slip Resistance | DIN 51130 | - | R9 |
| | BS-7976-2:2002 Pendulum | - | |

Certifications













