

VT.391BH

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





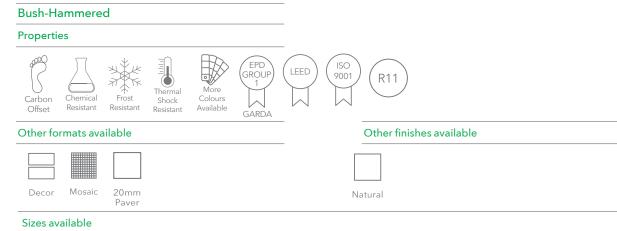



www.ecofriendlytiles.co.uk

ECO FRIENDLY TILES® The planet, covered Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.391BH



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Norm/test method	Required Standard	Results
EN ISO 10545-2	± 5.0% / ± 0.5mm	Conforms
EN ISO 10545-2	± 0.5% / ± 1.5mm	Conforms
EN ISO 10545-2	± 0.6% / ± 2.0mm	Conforms
EN ISO 10545-2	± 0.5% / ± 2.0mm	Conforms
EN ISO 10545-3	≤ 0.5%	≤ 0.1%
EN ISO 10545-4	AR ≥ 35 N/mm²	≥ 48 N/mm²
EN ISO 10545-5	-	≥ 0.80
EN ISO 10545-6	≤ 175mm³	< 150mm³
EN ISO 10545-8	-	6.6*10 ⁻⁶ °C
EN ISO 10545-9	-	No Damage
EN ISO 10545-11	-	Resistant
EN ISO 10545-12	UB Min.	Resistant
EN ISO 10545-13	Declared Value	A LA HA
EN ISO 10545-14	-	Minimum Class 5
DIN 51130	-	R11
BS 7976-2:2002 Pendulum	-	-
	EN ISO 10545-2 EN ISO 10545-2 EN ISO 10545-2 EN ISO 10545-3 EN ISO 10545-4 EN ISO 10545-5 EN ISO 10545-6 EN ISO 10545-8 EN ISO 10545-9 EN ISO 10545-11 EN ISO 10545-12 EN ISO 10545-13 EN ISO 10545-14 DIN 51130	EN ISO 10545-2 $\pm 5.0\% / \pm 0.5$ mm EN ISO 10545-2 $\pm 0.5\% / \pm 1.5$ mm EN ISO 10545-2 $\pm 0.6\% / \pm 2.0$ mm EN ISO 10545-2 $\pm 0.5\% / \pm 2.0$ mm EN ISO 10545-3 $\leq 0.5\%$ EN ISO 10545-4 AR ≥ 35 N/mm² EN ISO 10545-5 - EN ISO 10545-6 ≤ 175 mm³ EN ISO 10545-8 - EN ISO 10545-9 - EN ISO 10545-11 - EN ISO 10545-12 UB Min. EN ISO 10545-13 Declared Value EN ISO 10545-14 - DIN 51130 -

Certifications











