
## VT.634PAV

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.








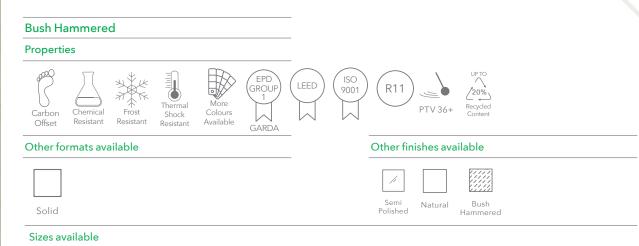

80cm

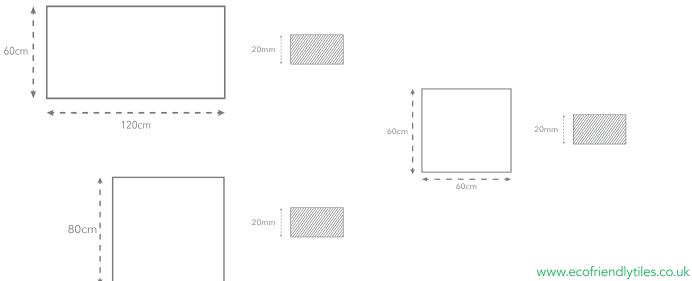



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

## Technical Specification Code: VT.634PAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties          | Norm/test method | Required Standard | Results                                 |
|---|------------------|-------------------|---|
| Thickness                               | EN ISO 10545-2   | ± 5.0% Max        | Complies                                |
| Straightness of Sides                   | EN ISO 10545-2   | ±0.3% Max         | Complies                                |
| Rectangularity                          | EN ISO 10545-2   | ± 0.3% Max        | Complies                                |
| Surface Flatness                        | EN ISO 10545-2   | ± 0.4% Max        | Complies                                |
| Water absorption                        | EN ISO 10545-3   | ≤ 0.5%            | ≤ 0.1%                                  |
| Flexion Resistance                      | EN ISO 10545-4   | ≥ 35 N/mm²        | ≥ 48 N/mm²                              |
| Impact Resistance                       | EN ISO 10545-5   | -                 | > 0.80                                  |
| Abraision Resistance                    | EN ISO 10545-6   | ≤ 175 mm³         | < 150 mm <sup>3</sup>                   |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8   | -                 | < 6.6*10 <sup>-6</sup> °C <sup>-1</sup> |
| Resistance to Thermal Shocks            | EN ISO 10545-9   | -                 | No damage                               |
| Frost Resistance                        | EN ISO 10545-12  | -                 | No damage                               |
| Resistance to Chemicals                 | EN ISO 10545-13  | B Minimum         | A, LA, HA                               |
| Resistance to Stains                    | EN ISO 10545-14  | -                 | 5                                       |
| Slip Resistance                         | DIN 51130        | -                 | R11                                     |
| Pendulum Test Value                     |                  | -                 | PTV 36+                                 |

## Certifications













