VT.646

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.






MOBILE SAMPLE LIBRARY REFERENCE

Stone Look Full Bodied

EPD Group 1 - Garda Range

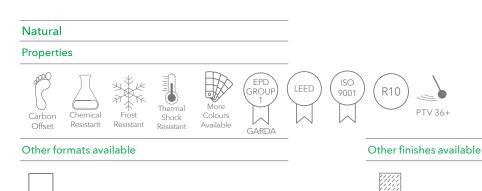


Bush

Hammered

Sizes available

Solid

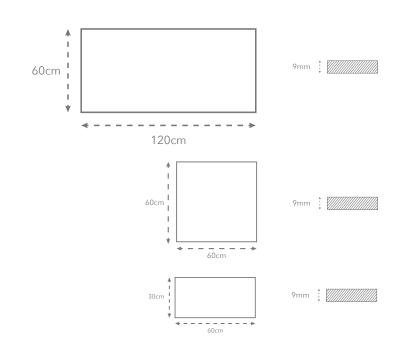



www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.646



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results |
|---|------------------|-------------------|---|
| Thickness | EN ISO 10545-2 | ± 5.0% Max | Complies |
| Straightness of Sides | EN ISO 10545-2 | ±0.3% Max | Complies |
| Rectangularity | EN ISO 10545-2 | ± 0.3% Max | Complies |
| Surface Flatness | EN ISO 10545-2 | ± 0.4% Max | Complies |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.1% |
| Flexion Resistance | EN ISO 10545-4 | ≥ 35 N/mm² | ≥ 48 N/mm² |
| Impact Resistance | EN ISO 10545-5 | - | > 0.80 |
| Abraision Resistance | EN ISO 10545-6 | ≤ 175 mm³ | < 150 mm ³ |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | - | < 6.6*10 ⁻⁶ °C ⁻¹ |
| Resistance to Thermal Shocks | EN ISO 10545-9 | - | No damage |
| Frost Resistance | EN ISO 10545-12 | - | No damage |
| Resistance to Chemicals | EN ISO 10545-13 | B Minimum | A, LA, HA |
| Resistance to Stains | EN ISO 10545-14 | - | 5 |
| Slip Resistance | DIN 51130 | - | R10 |
| Pendulum Test Value | | - | PTV 36+ |

Certifications













