
## **VT.657PAV**

Our EPD Group 1 - Garda Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.








# Bush Hammered Properties Carbon Offset Resistant Resistant Resistant Resistant Offset Offset Resistant R

#### Sizes available

Solid

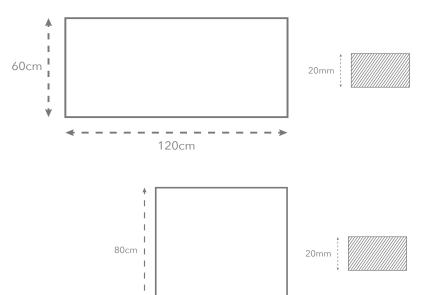

80cm

## 



Bush

Hammered

60cm

### www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.657PAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties          | Norm/test method | Required Standard | Results                                 |
|---|------------------|-------------------|---|
| Thickness                               | EN ISO 10545-2   | ± 5.0% Max        | Complies                                |
| Straightness of Sides                   | EN ISO 10545-2   | ±0.3% Max         | Complies                                |
| Rectangularity                          | EN ISO 10545-2   | ± 0.3% Max        | Complies                                |
| Surface Flatness                        | EN ISO 10545-2   | ± 0.4% Max        | Complies                                |
| Water absorption                        | EN ISO 10545-3   | ≤ 0.5%            | ≤ 0.1%                                  |
| Flexion Resistance                      | EN ISO 10545-4   | ≥ 35 N/mm²        | ≥ 48 N/mm²                              |
| Impact Resistance                       | EN ISO 10545-5   | -                 | > 0.80                                  |
| Abraision Resistance                    | EN ISO 10545-6   | ≤ 175 mm³         | < 150 mm <sup>3</sup>                   |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8   | -                 | < 6.6*10 <sup>-6</sup> °C <sup>-1</sup> |
| Resistance to Thermal Shocks            | EN ISO 10545-9   | -                 | No damage                               |
| Frost Resistance                        | EN ISO 10545-12  | -                 | No damage                               |
| Resistance to Chemicals                 | EN ISO 10545-13  | B Minimum         | A, LA, HA                               |
| Resistance to Stains                    | EN ISO 10545-14  | -                 | 5                                       |
| Slip Resistance                         | DIN 51130        | -                 | R11                                     |
| Pendulum Test Value                     |                  | -                 | PTV 36+                                 |

#### Certifications











