



VT.257

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE

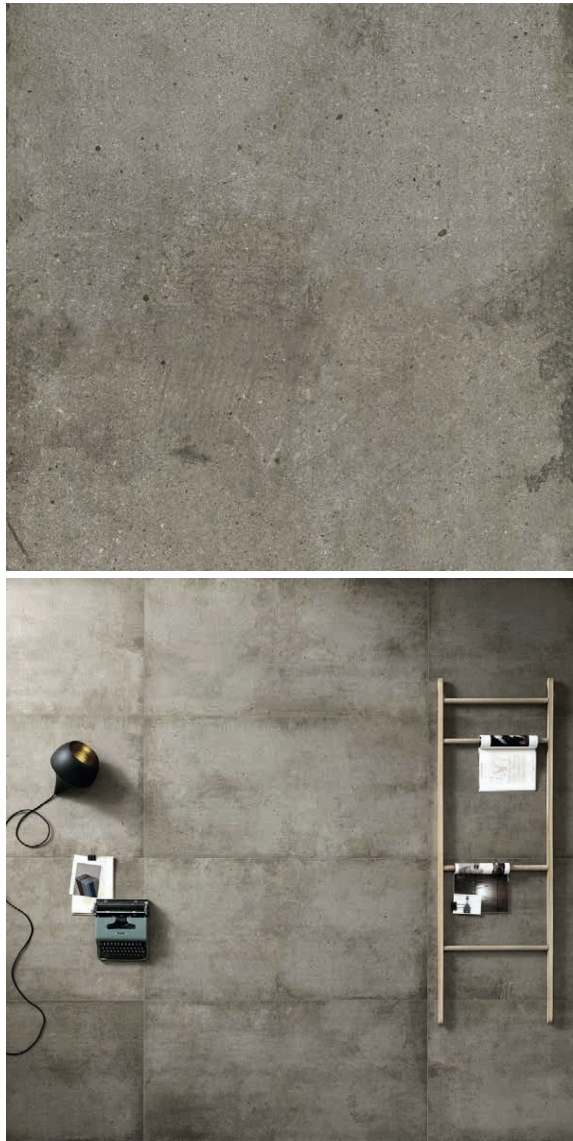



Concrete Look
High Slip
EPD Group 2 - Como Range


Natural


Properties



Carbon Offset



Chemical Resistant



Frost Resistant



Thermal Shock Resistant



More Colours Available



EPD GROUP 2
COMO



BREEAM



LEED


EMAS


ISO 14001


ISO 9001


R10


UP TO
40%
Recycled Content

Other formats


Other finishes

Sizes available

75cm

150cm


6mm



75cm

75cm


6mm



60cm

120cm


8mm



60cm

60cm


8mm



30cm

60cm

8mm





ECO FRIENDLY
TILES®
The planet, covered

www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk

Technical Specification

Code: VT.257



Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN
0844 980 2233
info@ecofriendlytiles.co.uk
www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results |
|---|-------------------------|------------------------|---------------------------------------|
| Thickness | EN ISO 10545-2 | ± 5.0% max | ± 5% |
| Length and Width | EN ISO 10545-2 | ± 0.6% max | ± 0.1% |
| Linearity | EN ISO 10545-2 | ± 0.5% | ± 0.1% |
| Warpage | EN ISO 10545-2 | ± 0.5% / ± 2.0mm | ± 0.2% |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.5% |
| Flexion Resistance | EN ISO 10545-4 | ≥ 35 N/mm ² | 49 N/mm ² |
| Abrasion Resistance | EN ISO 10545-6 | max 175mm ³ | 140mm ³ |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | - | 6.5X10 ⁻⁶ °C ⁻¹ |
| Resistance to Thermal Shocks | EN ISO 10545-9 | - | Resistant |
| Frost Resistance | EN ISO 10545-12 | UB Min. | Conforms |
| Resistance to Chemicals | EN ISO 10545-13 | UB Min | Conforms |
| Stain Resistance | EN ISO 10545-14 | - | Conforms |
| Slip Resistance | DIN 51130 | - | R10 |
| | BS 7976-2:2002 Pendulum | - | - |

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.