
VT.258


Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







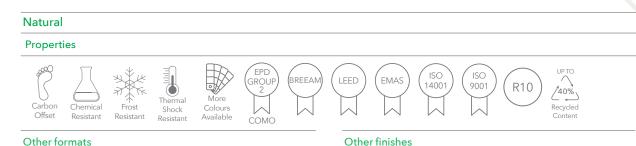

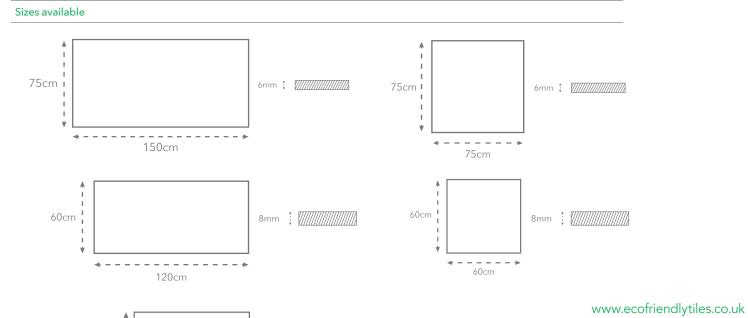

30cm

60cm

ECO FRIENDLY TILES® The planet, covered EcG 40 40 5W 08 infi

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.258



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% max	± 5%
Length and Width	IEN ISO 10545-2	± 0.6% max	± 0.1%
Linearity	EN ISO 10545-2	± 0.5%	± 0.1%
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.5%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	49 N/mm²
Abrasion Resistance	EN ISO 10545-6	max 175mm³	140mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	6.5X10 ⁻⁶ °C ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	UB Min.	Conforms
Resistance to Chemicals	EN ISO 10545-13	UB Min	Conforms
Stain Resistance	EN ISO 10545-14	-	Conforms
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	-

Certifications













