
VT.283

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Metallic/Solid Colour


EPD Group 2 - Como Range

Designer Series

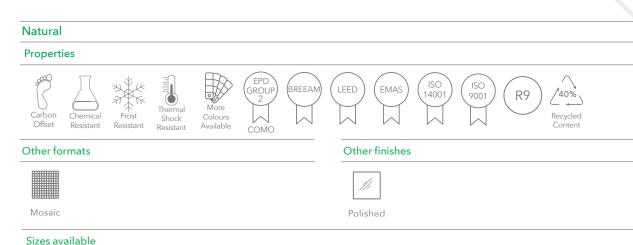

150cm ; 6mm ; 7





ECO FRIENDLY TILES®

The planet, covered

www.ecofriendlytiles.co.uk

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code:



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5%
Length and Width	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.1%
Linearity	EN ISO 10545-2	± 0.6% / ± 2.0mm	± 0.1%
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	0.02% - 0.04%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 55 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	130 mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	-	< 6.2*10 ⁻⁶ °C ⁻¹
Resistance to Thermal Shocks	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Resistant
Resistance to Chemicals	EN ISO 10545-13	-	Conforms
Stains Resistance	EN ISO 10545-14	Class 3 Min.	Class 5
Slip Resistance	DIN 51130	-	R9
	BS 7976-2:2002 Pendulum	-	-

Certifications













