


# VT.452P

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE

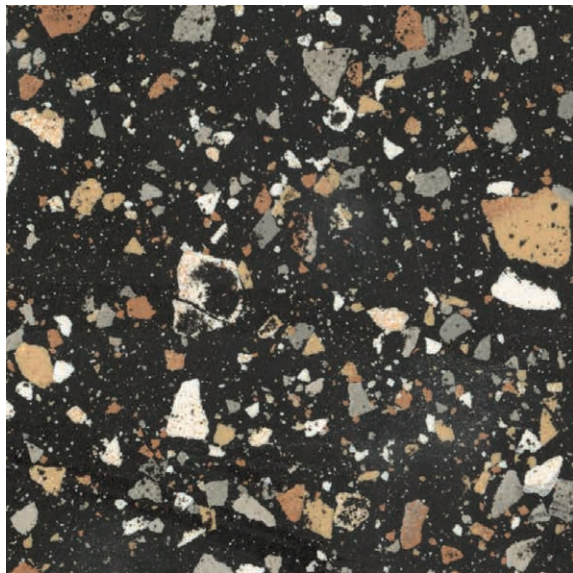



Terrazzo Look  
Polished Finish  
EPD Group 2 - Como Range


## Polished


### Properties


  
Carbon Offset


  
Chemical Resistant


  
Frost Resistant


  
Thermal Shock Resistant


  
More Colours Available


  
EPD GROUP 2  
COMO


  
BREEAM

  
LEED


  
EMAS


  
ISO 14001

  
ISO 9001

  
UP TO 40%  
Recycled Content

### Other formats

  
Mosaic

  
Decor

### Other finishes

  
Natural


  
Bush Hammered

### Sizes available

75cm

150cm


10mm



75cm

75cm


10mm



20cm

20cm


10mm



120cm

120cm


10mm



60cm

60cm


10mm



30cm

60cm


10mm



60cm

120cm

10mm



[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)



ECO FRIENDLY  
TILES®  
*The planet, covered*

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
[info@ecofriendlytiles.co.uk](mailto:info@ecofriendlytiles.co.uk)



Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%
Length and Width	EN ISO 10545-2	± 0.5% / ± 1.5mm	± 0.2%
Rectangularity	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%
Warpage	EN ISO 10545-2	± 0.5% / ± 2.0mm	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.06%
Flexion Resistance	EN ISO 10545-4	≥ 35 N/mm²	≥ 50 N/mm²
Abrasion Resistance	EN ISO 10545-6	175mm³	142mm³
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	≤ 9x10 <sup>-6</sup> °C <sup>-1</sup>	6.5x10 <sup>-6</sup> °C <sup>-1</sup>
Frost Resistance	EN ISO 10545-12	UB Min.	Resistant
Resistance to Chemicals	EN ISO 10545-13	GB Min	Resistant
	EN ISO 10545-14	Min Class 3	Class 5
Slip Resistance	DIN 51130	-	-
	BS 7976-2:2002 Pendulum	-	-

UNI EN ISO 14001

CECQUALITY

SISTEMA DI GESTIONE AMBIENTALE CERTIFICATO

Ecolabel

www.ecolabel.it

CE

EN 14411

U.S. GREEN BUILDING COUNCIL

USGBC

GREEN BUILDING COUNCIL

LEED

ITALIA

CCC

UNI EN ISO 9001:2008

CECQUALITY

SISTEMA DI GESTIONE QUALITÀ CERTIFICATO

This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.