VT.453

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







Natural Properties UP TO EPD GROUP 2 ISO 14001 ISO 9001 BREEAM LEED EMAS R10 /40% < Carbon Colours Recycled Shock

Other formats





Resistant

Resistant

Resistant

Available

COMO





Mosaic Decor











Bush Hammered

Sizes available

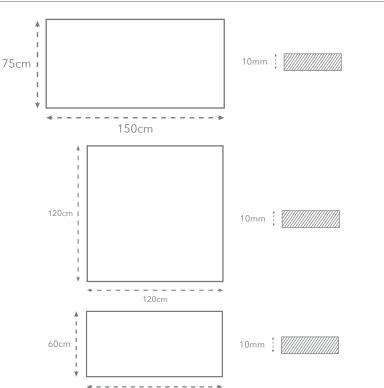

120cm

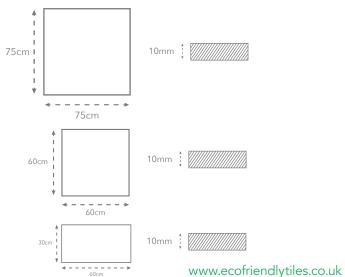

Content



The planet, covered

Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: VT.453



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method | Required Standard | Results | |
|---|-------------------------|---------------------------------------|---------------------------------------|--|
| Thickness | EN ISO 10545-2 | ± 5.0% / ± 0.5mm | ± 5.0% | |
| Length and Width | EN ISO 10545-2 | ± 0.5% / ± 1.5mm | ± 0.2% | |
| Rectangularity | EN ISO 10545-2 | ± 0.5% / ± 2.0mm | ± 0.2% | |
| Warpage | EN ISO 10545-2 | ± 0.5% / ± 2.0mm | ± 0.2% | |
| Water absorption | EN ISO 10545-3 | ≤ 0.5% | ≤ 0.06% | |
| Flexion Resistance | EN ISO 10545-4 | ≥ 35 N/mm² | ≥ 50 N/mm² | |
| Abrasion Resistance | EN ISO 10545-6 | 175mm³ | 142mm³ | |
| Coefficient of Linear Thermal Expansion | EN ISO 10545-8 | ≤ 9x10 ⁻⁶ °C ⁻¹ | 6.5x10 ⁻⁶ °C ⁻¹ | |
| Frost Resistance | EN ISO 10545-12 | UB Min. | Resistant | |
| Resistance to Chemicals | EN ISO 10545-13 | GB Min | Resistant | |
| | EN ISO 10545-14 | Min Class 3 | Class 5 | |
| Slip Resistance | DIN 51130 | - | R10 | |
| | BS 7976-2:2002 Pendulum | - | PTV 36+ | |

Certifications











