


# VT.584SP

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.




MOBILE SAMPLE LIBRARY REFERENCE

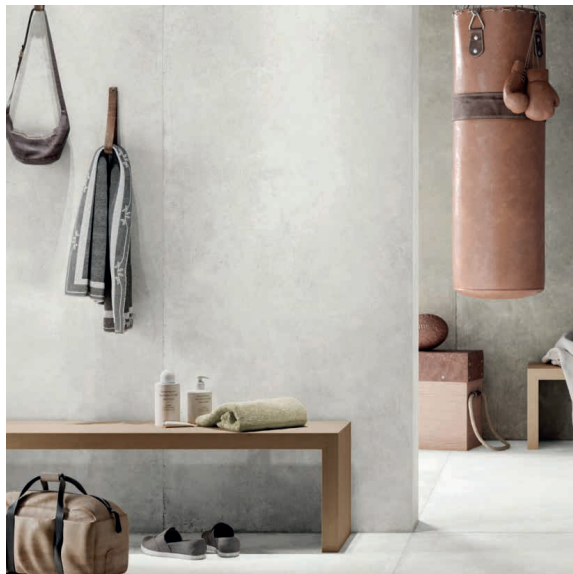



Concrete Look  
Semi-Polished Finish  
EPD Group 2 - Como Range


## Semi-Polished


### Properties


  
Carbon Offset


  
Chemical Resistant


  
Frost Resistant


  
Thermal Shock Resistant


  
More Colours Available


  
COMO


  
BREEAM

  
LEED


  
EMAS

  
ISO 14001

  
ISO 9001

  
UP TO 40% Recycled Content

### Other formats



20mm  
Paver


### Other finishes

  
Natural

  
Grip


### Sizes available

60cm




120cm

9mm




60cm




60cm

9mm




30cm




120cm

9mm




30cm



60cm

9mm



[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)



ECO  
FRIENDLY  
TILES®  
*The planet, covered*

Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
[info@ecofriendlytiles.co.uk](mailto:info@ecofriendlytiles.co.uk)

# Technical Specification

## Code: VT.584SP



Eco Friendly Tiles Ltd  
Ground Floor, Solon House  
40a Peterborough Road  
London  
SW6 3BN  
0844 980 2233  
info@ecofriendlytiles.co.uk  
[www.ecofriendlytiles.co.uk](http://www.ecofriendlytiles.co.uk)

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% / ± 0.5mm	± 5.0%
Length and Width	EN ISO 10545-2	±0.6% Max	± 0.2%
Linearity	EN ISO 10545-2	± 0.5% Max	± 0.2%
Warpage	EN ISO 10545-2	± 0.5% Max	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	≤ 0.06%
Breaking Modulus	EN ISO 10545-4	≥ 1300N	50 N/mm <sup>2</sup> (561kg/cm <sup>2</sup> )
Breaking Strength	EN ISO 10545-4	≥ 700N	2500 N ≥ 700N
Deep Abrasion Resistance	EN ISO 10545-6	≤ 175 mm <sup>3</sup>	< 143 mm <sup>3</sup>
Coefficient of Linear Thermal Expansion	EN ISO 10545-8	< 9*10 <sup>-6</sup> °C <sup>-1</sup>	< 6.5*10 <sup>-6</sup> °C <sup>-1</sup>
Frost Resistance	EN ISO 10545-12	-	Frost Proof
Resistance to Chemicals	EN ISO 10545-13	UB Minimum	Compliant
Resistance to Stains	EN ISO 10545-14	1 < X < 5	Class 5
Colour Resistance to Light	DIN 51094	-	No change
Slip Resistance	DIN 51130	-	-
	BS 7976-2:2002 Pendulum	-	-

### Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.