
# **VT.607**

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







## Natural **Properties**

















Other finishes









Recycled Content

#### Other formats










Hammered

#### Sizes available

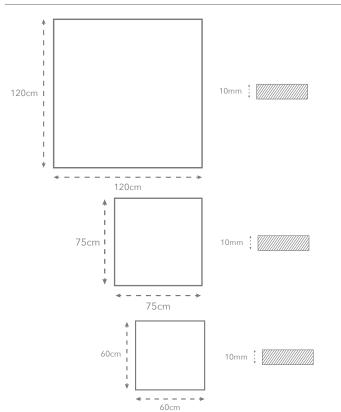





### www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.607



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

| Physical & chemical properties | Norm/test method        | Required Standard | Results                                 |
|--------------------------------|-------------------------|-------------------|---|
| Thickness                      | EN ISO 10545-2          | ± 5.0% Max        | ± 5.0%                                  |
| Length and Width               | EN ISO 10545-2          | ±0.6% Max         | ± 0.1%                                  |
| Linearity                      | EN ISO 10545-2          | ± 0.5% Max        | ± 0.1%                                  |
| Wedging                        | EN ISO 10545-2          | ± 0.5% Max        | ± 0.1%                                  |
| Warping                        | EN ISO 10545-2          | ± 0.5% Max        | ± 0.2%                                  |
| Water absorption               | EN ISO 10545-3          | ≤ 0.5%            | 0.02%, 0.04%                            |
| Modulus of Rupture             | EN ISO 10545-4          | ≥ 35 N/mm²        | 49 N/mm²                                |
| Resistance to Deep Abrasion    | EN ISO 10545-6          | ≤ 175 mm³         | 140 mm³                                 |
| Thermal Expansion Coefficient  | EN ISO 10545-8          | -                 | < 6.5*10 <sup>-6</sup> °C <sup>-1</sup> |
| Thermal Shock Resistance       | EN ISO 10545-9          | -                 | Resistant                               |
| Frost Resistance               | EN ISO 10545-12         | -                 | Conforms                                |
| Resistance to Chemicals        | EN ISO 10545-13         | UB Minimum        | A, LA, HA                               |
| Resistance to Stains           | EN ISO 10545-14         | 1 < X ≤5          | Class 5                                 |
| Colour Resistance to Light     | DIN 51094               | -                 | No change in Brightness or Colour       |
| Slip Resistance                | DIN 51130               | -                 | R10                                     |
|                                | BS 7976-2:2002 Pendulum | -                 | -                                       |

#### Certifications













