
## **VT.608BH**

Our EPD Group 2 - Como Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.





MOBILE SAMPLE LIBRARY REFERENCE Full Bodied Stone Look EPD Group 2 - Como Range

#### **Bush Hammered**

#### **Properties**



























Other formats


#### Other finishes







Natural Polished

### Sizes available

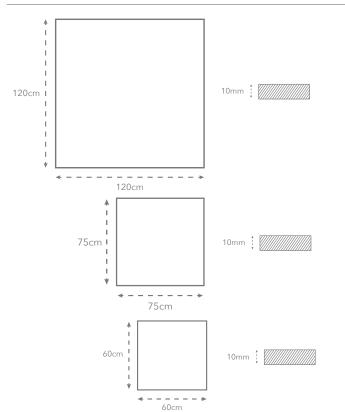





www.ecofriendlytiles.co.uk



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

# Technical Specification Code: VT.608BH



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Thickness	EN ISO 10545-2	± 5.0% Max	± 5.0%
Length and Width	EN ISO 10545-2	±0.6% Max	± 0.1%
Linearity	EN ISO 10545-2	± 0.5% Max	± 0.1%
Wedging	EN ISO 10545-2	± 0.5% Max	± 0.1%
Warping	EN ISO 10545-2	± 0.5% Max	± 0.2%
Water absorption	EN ISO 10545-3	≤ 0.5%	0.02%, 0.04%
Modulus of Rupture	EN ISO 10545-4	≥ 35 N/mm²	49 N/mm²
Resistance to Deep Abrasion	EN ISO 10545-6	≤ 175 mm³	140 mm³
Thermal Expansion Coefficient	EN ISO 10545-8	-	< 6.5*10 <sup>-6</sup> °C <sup>-1</sup>
Thermal Shock Resistance	EN ISO 10545-9	-	Resistant
Frost Resistance	EN ISO 10545-12	-	Conforms
Resistance to Chemicals	EN ISO 10545-13	UB Minimum	A, LA, HA
Resistance to Stains	EN ISO 10545-14	1 < X ≤5	Class 5
Colour Resistance to Light	DIN 51094	-	No change in Brightness or Colour
Slip Resistance	DIN 51130	-	R10
	BS 7976-2:2002 Pendulum	-	-

#### Certifications











