
6.5.APAV


Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.







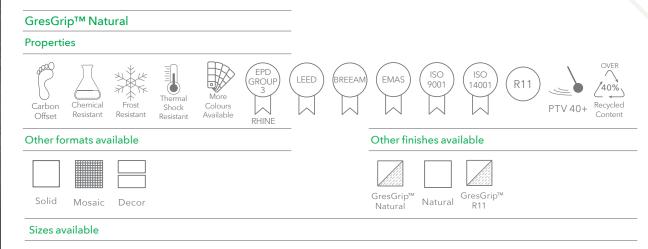

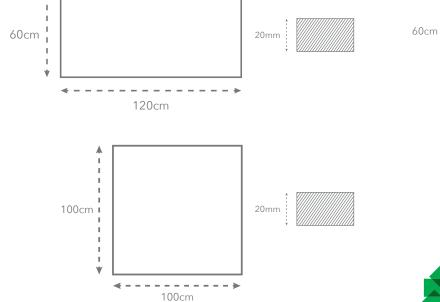

www.ecofriendlytiles.co.uk | Eco Friendly Tiles Ltd | Ground Floor Solon House

The planet, covered

60cm

ECO
FRIENDLY
TILES®

Eco Friendly Tiles Ltd
Ground Floor, Solon House
40a Peterborough Road
London
SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

Technical Specification Code: 6.5.APAV



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Norm/test method	Required Standard	Results	
EN ISO 10545-2	± 0.6% max	±0.2% max	
EN ISO10545-2	±5.0% max	±5.0% max	
EN ISO 10545-3	≤0.5%	<0.05%	
EN ISO 10545-6	≤175N/mm²	140mm²	
EN ISO 10545-8	-	7MK ⁻¹	
EN ISO 10545-12	-	Frost Resistance	
EN ISO 10545-13	UB min.	Uneffected	
DIN51130		R11	
BS 7976-2:2002 Pendulum		PTV 40+	
	EN ISO 10545-2 EN ISO 10545-2 EN ISO 10545-3 EN ISO 10545-6 EN ISO 10545-8 EN ISO 10545-12 EN ISO 10545-13 DIN51130	EN ISO 10545-2 ± 0.6% max EN ISO 10545-2 ±5.0% max EN ISO 10545-3 ≤0.5% EN ISO 10545-6 ≤175N/mm² EN ISO 10545-8 - EN ISO 10545-12 - EN ISO 10545-13 UB min. DIN51130	EN ISO 10545-2 ± 0.6% max ± 0.2% max EN ISO 10545-2 ±5.0% max ±5.0% max EN ISO 10545-3 ≤0.5% <0.05% EN ISO 10545-6 ≤175N/mm² 140mm² EN ISO 10545-8 - 7MK¹ EN ISO 10545-12 - Frost Resistance EN ISO 10545-13 UB min. Uneffected DIN51130 R11

Certifications











