6.5.B

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.

GresGrip[™] Natural

Chemical

Resistant

Other formats available

Frost

Resistant

Properties

Carbon

Offset



EPD Group 3 - Rhine Range

20mm Mosaic Decor Paver Sizes available 60cm 1 Ψ ----120cm 60cm Ŵ -- -60cm 8mm 🔅 🕅 30cm <----60cm

GROUF

 \sim

RHINE

More

Colours

Available

Thermal

Shock

Resistant

LEED

BREEAM

EMAS

Other finishes available

ISO 9001 ISO

14001

R10

ECO

TILES®

FRIENDLY

The planet, covered



www.ecofriendlytiles.co.uk

OVER

/40%

Recycled

Content

PTV 40+


Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN

0844 980 2233 info@ecofriendlytiles.co.uk

6.5.B

Our EPD Group 3 - Rhine Range for Floor & Wall comes in hundreds of different designs, colours, slip ratings and finishes. Much of the range offers our revolutionary GresGrip™ finish and is accredited to rigorous eco-friendly standards (including LEED/BREEAM etc) to help specifiers meet the sustainability goals of their clients.



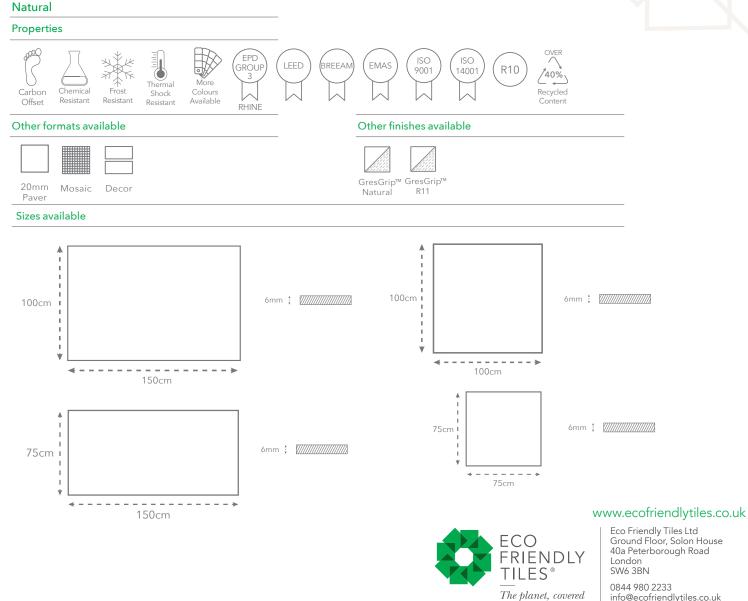

info@ecofriendlytiles.co.uk

Technical Specification **Code: 6.5.B**



Eco Friendly Tiles Ltd Ground Floor, Solon House 40a Peterborough Road London SW6 3BN 0844 980 2233 info@ecofriendlytiles.co.uk

www.ecofriendlytiles.co.uk

Physical & chemical properties	Norm/test method	Required Standard	Results
Length and Width	EN ISO 10545-2	± 0.6% max	±0.2% max
Thickness	EN ISO10545-2	±5.0% max	±5.0% max
Water Absorption	EN ISO 10545-3	≤0.5%	<0.05%
Resistance to Deep Abrasion	EN ISO 10545-6	≤175N/mm²	140mm ²
Thermal Expansion Coefficient	EN ISO 10545-8	-	7MK-1
Frost Resistance	EN ISO 10545-12	-	Frost Resistance
Chemical Resistance	EN ISO 10545-13	UB min.	Uneffected
Slip Resistance	DIN51130	-	R10
	BS 7976-2:2002 Pendulum	-	PTV 36+/PTV 40+
			* Please note that the 6mm thickness tiles do
			not have GresGrip™ Natural finish. They are
			a Natural finish and still offer R10 slip rating.
			** 60x120cm, 60x60cm and 30x60cm have
			GresGrip™ Natural finish which offers a slip
			rating of R10, PTV 40+

Certifications



This technical information sheet is not a guarantee of performance and is not a warranty, either explicit or implicit. Rather, it tries to summarize for the designer, installer or developer the technical data provided to Eco Friendly Tiles by the independent tile manufacturer. This information may not be applicable in all geographical areas. It is the responsibility of those individuals who are referring to this document to independently research and determine which tiles are suitable for a given project according to applicable British or International Standards and any governing legislative requirements. This document cannot be used as expert opinion, evidence or in any legal or administrative procedure unless authorized by Eco Friendly Tiles Ltd.